

**EUROPEAN PATENT APPLICATION**

Application number: 89202710.3

Int. Cl.<sup>5</sup>: **A61N 5/10** , **A61M 36/00** ,  
**A61B 6/00**

Date of filing: 27.10.89

Priority: 28.10.88 US 263937

Date of publication of application:  
02.05.90 Bulletin 90/18

Designated Contracting States:  
AT BE CH DE ES FR GB GR IT LI LU NL SE

Applicant: Van 't Hooft, Eric  
Gezichtslaan 16  
NL-3956 BB Leersum(NL)

Inventor: van 't Hooft, Eric  
Gezichtslaan 16  
NL-3956 BB Leersum(NL)  
Inventor: van Zwol, Libbe  
Dreef 5  
NL-3956 EP Leersum(NL)


Representative: Smulders, Theodorus A.H.J.,  
Ir. et al  
Vereenigde Octrooibureaux Nieuwe Parklaan  
107  
NL-2587 BP 's-Gravenhage(NL)

**Improved adaptor for remote after-loading apparatus for radiotherapy.**

The adaptor for connecting a guide member in a remote after-loading apparatus for radiotherapy is provided. The adaptor comprises an outer barrel (80) having an opened end, a connector end and a centrally extending aperture. A sleeve (92) passes through the aperture of the barrel such that at least a first end of the sleeve is contained within the barrel. An elongated gripping means (84) is disposed through the sleeve and extends beyond the ends of the sleeve. The gripping means has a gripping end and a receiving end, a gripping body extending between the ends, and a flange (83) disposed on the gripping end with the diameter of the flange being greater than the diameter of the sleeve. A tapered outer surface (95) extends from the flange to a distant portion of the gripping body. A uniform diameter tube bore is disposed through the gripping means and at least two slots (99) pass through the flange and at least a portion of the gripping body. Those slots form at least two opposed gripping portions which are inwardly compressible when the flange and the gripping portions are in contact with the first end of the sleeve, so as to form a reduced

diameter of the tube bore and thereby a closed position of the gripping portions. The gripping portions are sufficiently resilient so that when the flange and the gripping portions are disposed from the first end of the sleeve, the gripping portions form at least the same diameter as the tube bore and thereby an open position. Spring means (41) are disposed between the gripping means in the sleeve for urging the flange of the gripping means toward the second end of the sleeve.

**FIG. 6**

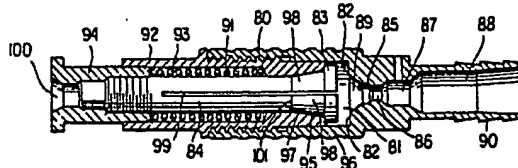

## IMPROVED ADAPTOR FOR REMOTE AFTER-LOADING APPARATUS FOR RADIOTHERAPY

The present invention relates to an improvement in a remote after-loading apparatus for brachy therapy, e.g. interstitial, intracavitary and intraluminal radiotherapy, and more particularly, to adaptors for such apparatus.

### BACKGROUND OF THE INVENTION

Brachy therapy has become of increased importance in the treatment of certain diseases, especially cancer, in that the radiotherapy can be administered to very localized human body areas, as opposed to broad beam radiotherapy. To achieve this localized radiotherapy, a radioactive source must be placed in close proximity to the tissue being treated, since the radioactive source effects only low levels of radiation at a significant distance from the source, while high levels of radiation are effected near the source, i.e. the application of the inverse square of the distance law. The application of the radiotherapy is normally achieved by guiding a radioactive source through at least one guide member, e.g. a position member or a tubular guide, until that source reaches the site of the tissue to be treated, e.g. cancerous tissue. A regimen of radiation is then administered according to a program defined for the particular cancerous tissue and that therapy is, usually, periodically repeated until effective control of the cancerous tissue is achieved.

However, since radiation is involved in the therapy, technicians who routinely administer the therapy to a number of patients would be unduly exposed to radiation in the conduct of those therapies if the technician were in close proximity to the patient being treated. To avoid such radiation hazard to the technician, apparatus has been developed for allowing the radiation source to be moved to the site of the radiotherapy while the technician is not in close proximity to the patients being treated, e.g. is not in the treatment room where the patient is being treated. Such apparatus is known in the art as remote after-loading apparatus for brachy therapy. When using such apparatus, a physician places a positioning member, e.g. a needle or canula, at the site where radiotherapy is to be effected. This positioning member in some applications may be attached to one end of a tubular guide and the tubular guide is attached at the other end thereof to a connection head of the remote after-loading apparatus. After such positioning and connections are made, a technician, from a remote location, e.g. another room, can cause the

apparatus to drive a cable with a radioactive source attached thereto from a "safe", through the remote after-loading apparatus, the guide member, e.g. tubular guide, and into the positioning member for radiotherapy. Thus, a technician will not be in close proximity to the patients, e.g. will be in another room, while the radioactive source is out of the "safe" and while administering the therapy.

While apparatus of the above nature has been used for some time, a particular problem in connection therewith has been the adaptors for connecting the guide member, e.g. tubular guide, and/or the positioning member to the connection head of the remote after-loading apparatus or attaching the one to the other. For example, since the cable, with the radioactive source, must slide through the tubular guide, and the tubular guide is quite small, any kinking, compressed configuration, or the like of the flexible plastic tubular guide, caused by the adaptor, can cause the cable moving the radioactive source to bind therein, which results in a failure of moving the radioactive source to the correct site for effective radiotherapy. Thus, the adaptors have been a constant problem in the art. In addition, once the positioning member is in place in the patient, it is important to quickly and effectively connects the tubular guide to the positioning member or the positioning member to the connection head so as to minimize delay and discomfort to the patient.

In the past, such adaptors have taken the general form of metal tubes and the tubular guide or positioning member is slid (partially forced) thereover. However, in view of the very small diameters of the flexible, plastic tubular guides or positioning members, the time required for so attaching the same to a metal tube is inordinately long and in addition, distortion during attachment can cause uneven compression of the flexible, plastic tubular guide or positioning member which will result in the kinking, binding and the like of the cable with the radioactive source attached thereto. Thus, it would be of substantial advantage to the art to provide improved adaptors for connecting the tubular guide or positioning member to the connection head or to each other wherein the adaptors allow for quick and easy connections without the necessity of fitting to a metal tube or any other laborious attachments, such as screwing or unscrewing devices, and where such connections avoiding distortion or compression of the tubular guide or positioning member so as to avoid the kinking, binding and the like by the cable.

### BRIEF DESCRIPTION OF THE INVENTION

Generally speaking, the necessary parts of a remote after-loading apparatus for brachy therapy comprises a radioactive source, a safe for the source (to avoid radiation exposure to technicians working with the apparatus), a source drive cable for driving the source from the safe to the site of the therapy, a guide member for guiding the cable to the site of the radiotherapy, a connection head for connecting the guide member to the source drive cable, a positioning member for positioning the source at the site of the radiotherapy and adaptors for connecting the guide member to the connection head and/or the positioning member. In this combination, the present invention involves an improvement in the adaptors for connecting the guide member to the connection head and/or the positioning member. The guide member may be in the form of, for example, a canula disposed from the head to the site of radiotherapy, and thus the guide member includes the positioning member, or in the form of a tubular guide which is connected to a positioning member. For the sake of conciseness, the invention will be, mainly, described in regard to the embodiment which uses a tubular guide, but it is to be understood that the invention is fully applicable to both of these embodiments.

The adaptor comprises an outer barrel having an opened end and a connector end and having a centrally extending aperture therein. A sleeve having a first end and a second end and a passageway extending between said ends is disposed within the barrel such that at least the first end of the sleeve is contained within the barrel. An elongated gripping means is disposed through the sleeve passageway and extends beyond the ends of the sleeve. The gripping means has a gripping end and a receiving end, a gripping body extending from the gripping end to the receiving end, and a flange disposed on the gripping end such that the diameter of the flange is greater than the diameter of the sleeve passageway at the first end thereof. There is a tapered outer surface extending from the flange to a distant portion of the gripping body. A uniform diameter gripping means tube bore is disposed through the gripping means and at least two slots pass through the flange and the gripping body and extend from the flange to at least the distant portion of the gripping body. Those at least two slots form at least two opposed gripping portions of the gripping means and the gripping portions are inwardly compressible when the flange and the gripping portions are in contact with the first end of the sleeve, so as to form a reduced diameter of the tube bore and thereby a closed position of the gripping portions. The gripping por-

tions are sufficiently resilient so that when the flange and the gripping portions are axially disposed from the first end of the sleeve, the gripping portions form at least the same diameter as the tube bore and thereby an open position. Spring means are disposed between the gripping means in the sleeve for urging the flange of the gripping means toward the second end of the sleeve.

With this arrangement the tubular guide (or the positioning member) may be moved into the receiving end of the gripping means, moved to engage the gripping portions in the closed position, moved so as to cause the gripping means to be moved against the spring means axially outwardly from the first end of the sleeve to a position where at least a portion of the tapered outer surface is spaced from the first end of the sleeve and the flange and the gripping portions are resiliently moved to the open position and allow passage of the tubular guide (or positioning member) therethrough. Upon ceasing the movement of the tubular guide (or positioning member), the spring means urges the gripping means axially inwardly in the sleeve so that a portion of the tapered outer surface contacts the first end of the sleeve and compresses the gripping portions to a locked position around the tubular guide (or positioning member).

By this arrangement, the tubular guide (or positioning member) may be very quickly inserted into the adaptor and locked in place by that insertion in such a manner that the tubular guide (or positioning member) is not substantially compressed, and thereby avoids kinking and binding and the like of the source drive cable.

### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a diagrammatic view of the basic parts of a conventional remote after-loading apparatus for brachy therapy.

Figure 2 is a diagrammatic illustration of positioning members positioned for treatment of breast cancer and showing the positioning members being connected via adaptors to tubular guides (one of the embodiments of the invention).

Figure 3 is a diagrammatic illustration of a positioning member in position for treating lung cancer.

Figure 4 is an exploded view, partly in cross section, of an embodiment of the adaptor of the present invention.

Figure 5 is an assembled view of Figure 4.

Figure 6 is a view of a preferred embodiment of the present adaptor, which view is partially in cross section.

Figure 7 is a view of a further preferred

embodiment of the present adaptor, having an indicator connected therewith, and that view is partially in cross section.

#### DETAILED DESCRIPTION OF THE INVENTION

While remote after-loading apparatus for brachy therapy, e.g. intracavitary intraluminal and interstitial radiotherapy, is well known in the art (see for example applicant's U. S. applications Serial No. 017,036, filed February 18, 1987, and Serial No. 071,835, filed July 10, 1987, the entire disclosures of which are incorporated herein by reference), and need not be described in detail herein for sake of conciseness, for context purpose, a typical arrangement of such apparatus is shown in Figure 1. The basic parts of a typical apparatus are as follows. A radioactive source (not shown in the drawings) is contained in a safe 1 which protects technicians from radiation while working with the apparatus. A source drive cable 2 is driven by a source drive mechanism 3. To position the radioactive source at the site of the therapy a guide member, e.g. a tubular guide 4 is as disposed so as to guide the drive cable 2 to the site of the radiotherapy. It should be understood in this regard that the patient being treated will be in proximity to the remote after-loading apparatus and may be conveniently sitting in a chair or lying on a bed, depending primarily upon the particular radiotherapy being administered. Thus, the tubular guide is necessary for guiding the drive cable 2 with the radioactive source from the safe to the site of treatment. A connection head 5 connects one or more of tubular guides 4 to one or more of source drive cables and these one or more connections are referred to as "channels." As noted above, for some applications, the positioning member may extend from the site to be treated to the connection head 5, and in this form the positioning member includes the guide member, but for sake of conciseness, the embodiment where the positioning member and the guide member are separate, i.e. utilizing a tubular guide will be mainly discussed. It will be appreciated that in any one therapy one or a number of radioactive sources may be used at one time, and the use of more than one source necessitates a like number of tubular guides 4 connected to connection head 5. Only one tubular guide 4, and hence only one "channel", is shown in Figure 1 for clarity. A positioning member 6 is placed by a physician for the radiotherapy (as shown in more detail in Figures 2 and 3, discussed below) and that positioning member is connected to tubular guide 4 by way of an adaptor 7. An adaptor 8 also connects tubular guide 4 to connection head 5.

While not shown in the drawings, such apparatus may also have a check cable, driven by check cable drive. The check cable is used to test the connections of the apparatus to the patient prior to moving the radioactive source from the safe to the patient. The check cable insures that all connections are operating properly and that the positioning members are correctly in place before the radioactive source is removed from the safe. Additionally, such apparatus may have an automatic calibration device (not shown in the drawings) for calibrating the excursion of the cable to insure that the cable has reached the correct position at the therapy site. Further, such apparatus may have an indexer for indexing the cables, especially where a plurality of cables are used for multiple radioactive source therapy. Finally, such apparatus may have an optical verification device (not shown in the drawings) for verifying that the adaptor 8 is properly connected to connection head 5. These verification devices usually consist of an electric eye which senses a portion of the adaptor 8 when that adaptor is placed in connection head 5.

Figure 2 shows positioning members 20, which can take the form of needles, tubes, canula, or the like, placed about a breast cancer 21 by a physician. Positioning members 20 are connected to tubular guides 22 by adaptors 23 (in this illustration, three "channels" are used).

Figure 3 shows a positioning member 30, in the form of a canula, inserted in the bronchus 31 for treating a lung cancer 32. In this embodiment, the canula 30 may extend from the head 5 to the cancer 32 and as such the canula 30 functions as both the tubular guide and the positioning member. Hence, the canula 30 need only have an adaptor for connecting the canula 30 to head 5, as briefly noted above.

Figures 2 and 3 are simply diagrammatic illustrations of typical arrangements for radiotherapy using a remote after-loading apparatus. However, similar arrangements can be used for treating the oesophagus, the head and neck, the oral cavity, the brain, the cervix, the endometrium, the prostate, the bladder, the bowel duct, and the nasopharynx, among others. The various arrangements for treating the various body parts varies with the particular treatment, but all of the arrangements have in common the basic parts of the remote after-loading apparatus, as described above. Thus, no further explanation of the known remote after-loading apparatus for radiotherapy need be described herein, and more details can be found in the brochure MICROSELECTRON HDR <sup>192</sup>Ir published by Nucletron International BV, Leersum, The Netherlands, the entire disclosure of which is incorporated herein by reference. Additional disclosure may be found in the publication

MICROSELECTRON LDR/MDR <sup>192</sup>Ir <sup>137</sup>Cs published by Nucletron Trading BV, Leersum, The Netherlands, the entire disclosure of which is incorporated herein by reference.

As noted above, a major problem in connection with the use of such apparatus has been in regard to the adaptors 7 and 8 (see Figure 1) for connecting guide members, e.g. tubular guide 4 to the positioning member 6 and to the connection head 5. Also, as noted, typically the prior art used metal tubes for making such attachments of the guide member, e.g. tubular guide 4 to the adaptors. The guide member is quite small, especially guide members in the form of a canula for bronchus application, which canula extends from the site of therapy to the connection head 5 and such guide members are typically no more than two millimeters in diameter, with a lumen which is less than about 1.8 millimeters. As can be appreciated, using conventional adaptors, as explained above, and the like for attaching such small tubular guides to the adaptors requires fine and intricate work, and such work considerably slows down the attachment of the tubular guide to the positioning member, once the positioning member is in place in the patient, and delays attaching the tubular guide to the connection head 5 of the after-loading apparatus. When multiple "channels" are used, considerable delays are experienced. Further, in view of such small diameters, it is easy to unduly distort or compress the tubular guide with such adaptors and such distortion or compression can cause kinking or binding of the source drive cable when passing therethrough. The clearance between the lumen of the tubular guide and the source drive cable is kept small so that the source drive cable may be driven through that lumen, even in complex configurations, without kinking. The probability of such distortion or compression of the tubular guide with such conventional adaptors makes conventional adaptors a serious problem in the art of the remote after-loading apparatus.

The invention provides an adaptor which can be used for connecting the tubular guide to the connection head and the positioning member, as shown in Figure 1, or the positioning member to the tubular guide, as shown in Figure 2, or the tubular guide, in the form of a canula, to the connection head, as shown in Figure 3, in a fast and efficient manner and with virtually no possibility of unduly compressing or distorting the tubular guide and thus avoids kinking or binding of the source drive cable while passing therethrough. The invention is based upon clamping the tubular guide with compressible members so that the compression of the tubular guide within those members is essentially uniform around the circumference of the tubular guide being attached. Further, the invention

is based on the attachment of the tubular guide to the adaptor being made simply by inserting the tubular guide into the adaptor, with which insertion the clamping by the adaptor automatically occurs. As can be appreciated, by providing that the compressive clamping around the tubular guide is essentially uniform around the circumference thereof, no undue compression or distortion of the tubular guide will occur and the lumen of the tubular guide will remain essentially circular, as opposed to prior art adaptor means. When the lumen remains essentially circular, there is a considerably reduced risk of the source drive cable binding or kinking while being passed from the remote after-loading apparatus to the site of therapy. Also, as will be appreciated, with the clamping device being actuated simply by inserting the very small tubular guide into the adaptor, it is very easy to make connections between the tubular guide and the positioning member and the tubular guide and the connection head, once the positioning member has been placed in the patient by the physician. This allows quick and efficient use of the apparatus, and minimizes delays and discomfort to the patient.

The principle of the present adaptor is shown in Figure 4. The adaptor has an outer barrel 40 having an opened end 41 and a connector end 42. In this embodiment, the connector end 42 is previously attached to the tubular guide 4 (see Figure 1) and the adaptor will in turn connect to a positioning member 20 (see Figure 2). The barrel 40 also has a centrally extending aperture 43 therein. A sleeve 44 has a first end 45, a second end 46 and a passageway 47 extending between those two ends 45 and 46. The sleeve is configured so that it may be disposed within barrel 40 (Figure 4 is an exploded view) such that at least the first end 45 of the sleeve 44 is contained within the barrel 40.

While various modes of manufacture may be employed, for simplicity in illustrating the invention in Figure 4, sleeve 44 is secured in barrel 40 by threads 48 of the sleeve 44 and threads 49a of barrel 40. Other modes of assembly may be used, and the modes of assembly are not critical. However, if threaded assemblies, such as that shown in Figure 4, are used, it is preferable that the assembly be firmly affixed together, e.g. by soldering or by use of a joint compound such as LOCKTITE, so that it may not be taken apart, in order to avoid damage to the connector.

An elongated gripping means, generally, 49 is disposed through sleeve passageway 47 and extends beyond ends 45 and 46 of the sleeve 44. The gripping means has a tubular guide gripping end 50 and a tubular guide receiving end 51. A gripping body 52 extends from the gripping end 50 to the receiving end 51. A flange 53 is disposed on gripping end 50 and the diameter of the flange is

greater than the diameter of the sleeve passageway 47 at the first end 45 of sleeve 44 so that the axial excursion of the gripping means 49 to the left as shown in the drawing is limited when flange 53 contacts the first end 45 of sleeve 44. A tapered outer surface 54 extends from flange 53 to a distant portion 55 on the gripping body. A uniform diameter gripping means tube bore 56 extends through the gripping means 49. There are at least two opposed slots 57 (one shown in Figure 4) passing through the flange 53 and the gripping body 52 and these slots extend from the flange to at least a distant portion 55 of the gripping body, although preferably these slots extend therebeyond, as shown in Figure 4 and as explained more fully hereinafter. The at least two opposed slots 57 form at least two opposed gripping portions 58 and 59 of the gripping means 49 and the gripping portions 58 and 59 are inwardly compressible when the flange 53 and the gripping portions 58 and 59 are in contact with the first end 45 of sleeve 44, so as to form a reduced diameter of the tube bore 56 of that portion of gripping means 49, and thereby forms a closed position of the gripping portions 58 and 59. The gripping portions 58 and 59, by virtue of slots 57 are also sufficiently resilient so that when the flange 53 and the gripping portions 58 and 59 are axially disposed from the first end 45 of sleeve 44 (to the right as shown in Figure 4) that the gripping portions 58 and 59 form an opening having at least the same diameter as the tube bore 56 and thereby, also, forms the open position of gripping portions 58 and 59.

Spring means 60 are disposed between the gripping means 49 and sleeve 44 for urging flange 53 of the gripping means 49 toward the second end 46 of sleeve 44.

As noted above, the embodiment of Figures 4 and 5, for illustrative purposes, shows the assembly by threads, although other assemblies may be used. However, for completing the assembly shown in Figures 4 and 5, a guide tube collar 61 is threaded onto gripping means 49 by threads 62 on both the gripping means 49 and collar 61. The collar 61 has an aperture 63 which communicates with tube bore 56 of gripping means 49, and when assembled, tube bore 56 also communicates with barrel bore 64 of barrel 40 such that there is a continuous communication through collar 61, gripping means 49 and barrel 40. This continuous communication forms a passageway through the adaptor for the tubular guide and positioning member, through which the source drive cable 2 passes. To facilitate the insertion of the positioning member 6 (see Figures 1 and 5) into the adaptor, collar 61 has a taper 65 for ease of insertion thereinto.

It will also be seen that when the arrangement of Figure 4 is in an assembled position, spring 60 will be held in place by being between sleeve 44 and gripping means 49, as well as between shoulder 66 of collar 61 and flange 67 of sleeve 44. With the spring so restrained, it will urge collar 61 axially to the left as shown in the drawings, and since collar 61 is attached to gripping means 49, gripping means 49 will likewise be urged axially to the left as shown in the drawings and cause flange 53 to seat against first end 45 of sleeve 44, thus causing the gripping portions 58, 59 to be resiliently moved radially inwardly and form a diameter less than the diameter of bore 56, i.e., the closed position thereof.

When it is desired to attach a positioning member 6, such as a canula, to the adaptor, the end 68 thereof (see Figure 5) is placed into taper 65 (see Figure 4) and passed through aperture 63 of collar 61, through the receiving end 51 of the gripping means 49, and subsequently through tube bore 56 of gripping means 49 until it reaches the distant portion 55 of gripping means 49. At that point, the diameter of tube bore 56 is less than the diameter of canula 6 and end 68 thereof will abut the reduced diameter portion of tube bore 56 (the closed position of the gripping means). However, with further movement of canula 6, gripping means 49 is displaced against spring 60 and axially outwardly of first end 45 of sleeve 44 (to the right as shown in the drawings) and as the tapered outer surface 54 clears first end 45, gripping portions 58 and 59, no longer being compressed within first end 45, will expand to a diameter at least the same as the diameter as that of bore 56 and canula 6. With continued movement of canula 6, the end 68 thereof will pass through gripping means 49 and finally will abut the entrance 70 of barrel bore 64, where end 68 will come to a stop. When that occurs, spring 60 will urge gripping means 49 and flange 53 axially toward second end 46 of sleeve 44 and cause gripping portions 58, 59 to again be compressed by first end 45 of sleeve 44 around canula 6. This will, of course, cause a gripping action by gripping portions 58, 59 on canula 6 and lock the canula 6 in that position. That lock will be most secure, since any movement of canula 6 to the left, as shown in the drawings, will cause gripping portions 58, 59 to be further compressed by first end 45 and will cause further gripping and locking of canula 6 in that position.

Thus, the canula may be moved into the receiving end 51 of the gripping means 49 and moved to an engagement with the gripping portions 58, 59 which are in the closed position. Further movement of canula 6 causes the gripping means to be moved against spring means 60 axially outwardly from the first end 45 of sleeve 44 to a

position where at least a portion of the tapered outer surface 54 is spaced from the first end 45 of sleeve 44 and the flange 53 and gripping portions 58, 59 are resiliently moved to an open position. This allows passage of canula 6 therethrough and upon ceasing the movement of canula 6, the spring means 60 urges the gripping means 49 and flange 53 axially inwardly in sleeve 44 so that a portion of the tapered outer surface 54 contacts first end 45 of sleeve 44 and compresses the gripping portions 58, 59 to a locked or closed position around canula 6.

The present adaptor can be further understood from Figure 6 which is similar to the embodiment of Figure 4 but shows certain components in more detail and shows a preferred embodiment of the invention. As opposed to barrel aperture 43 in Figure 4, as shown in Figure 6, barrel 80 has an aperture 81 that ends in an abutment 82 in substantially the same configuration as that of flange 83. Thus, flange 83, when moving to the right as shown in the drawing (when canula 6 -- not shown in Figure 6 -- is being passed therethrough) will contact abutment 82 so that flange 83 can move no further axially out of barrel 80 (to the right as shown in the drawing) and, likewise, no further axial movement (to the right as shown in the drawing) of the gripping means 84 (shown in side view-not in section) is achievable. This configuration provides a positive and very precisely determined stop for the gripping means 84. Also, it will be noted that abutment 82 has an axially disposed abutment aperture 85 therein which has a diameter equal to that of the tube bore (or canula 6) for passing canula 6 therethrough. Abutment aperture 85 has a second abutment 86, the shoulders of which are less than the diameter of canula 6, so that when the canula 6 contacts second abutment 86, it comes to a positive stop. Therefore, the exact position of the canula 6 can be determined from the present adaptor. Further apertures 87 and 88 complete the communication through the adaptor. Preferably, abutment aperture 85 has a centering taper 89 so as to center canula 6 as it passes therethrough. As noted, the abutment aperture 86 is in communication with canula 6 which is in turn in communication with a conventional coupling 90 which can be attached to various devices, such as a tubular guide as described above.

The embodiment of Figure 6 differs from the embodiment of Figure 4, also, in that spring 91 is restrained within sleeve 92 and a recess 93 which cooperates with collar 94. Also, there is a tapered portion 95 adjacent the first end 96 of sleeve 92 (the taper is shown in Figure 4 but is not discussed in connection therewith). That tapered portion 95 is of the same taper configuration as the tapered outer surface 97 of gripping means 84. This allows

a more positive opening and closing of opposed gripping portions 98 for a more positive release and locking of the tubular guide. Preferably, the spring means 60, in Figure 4, and 91 in Figure 6, is a coiled spring, although other spring arrangements may be used, and more preferably, the coiled springs surrounds the gripping means, as shown in Figures 4 and 6.

Also, in Figure 6, collar 94 has a centering taper 100, similar to the taper 65 in Figure 4, so that the receiving end of the gripping means can be easily contacted with a positioning member 6, such as a canula, when being inserted thereto.

The tapered outer surfaces 54 and 97 of the gripping means 49 and 84 are shown in Figures 4, 5 and 6 as straight tapers. However, in lieu thereof curved tapers may be used, but straight tapers are preferred. Also, while, of course, there must be at least two opposed slots 57 and 99 in gripping means 49 and 84 (see Figures 4 and 6), so as to provide at least two opposed gripping portions 50 and 98, preferably, there are at least three such slots and, corresponding three gripping portions. More preferably, the slots are at 120° apart and the gripping portions are of equal size. However, a better and more positive gripping action can be achieved, with even less tendency to compress or distort the tubular guide, when there are at least four slots and four opposed gripping portions, and particularly, when the slots are 90° apart and the gripping portions are of equal size. Further, to achieve the best gripping action of the gripping means, the slots extend to at least one-quarter of the length of the gripping body and more preferably the slots extend to at least one-half the length of the gripping body. Likewise, to insure reasonable gripping of the canula 6, the distant portions 55 and 101 of the gripping body 52 and 84 (see Figures 4 and 6) to which the tapers extend is a distance from the flange which is at least equal to the diameter of the gripping means bore, and, more preferably, at least twice that diameter.

The embodiment shown in Figure 7 is similar to that shown in Figure 6, with the major exception that the embodiment of Figure 7 also has associated therewith an indicator means and may be used to connect either a tubular guide or a canula to head 5 (see Figure 1). In Figure 7 the abutment aperture 109 connects with an indicator aperture 110 in indicator means, generally, 111. The indicator means has an indicator housing 112 with a connection end 113, usually in the shape of a groove or sleeve, and an indicator end 114. Axially positioned in housing 112 is a housing aperture 115 which housing aperture connects with the indicator aperture 110. An indicator body 116 is disposed within housing 112 and within the housing aperture 115. Indicator body 116 connects indicator

end 114 and connection end 113. An indicator bore 117 passes through the indicator body with a portion of the indicator bore 117 which is within the indicator aperture 110 having the same diameter as the diameter of the tube bore of gripping means 84 and the remainder of the indicator bore 117 having a reduced bore 118 of a diameter which is less than the diameter of the tube bore of gripping means 84 so that the tubular guide or canula may be moved through the adaptor and into the indicator means to a position where the tubular guide or canula contacts the reduced diameter 118 of the indicator bore 117.

An indicator flange 119 is disposed at the indicator end 114 of the indicator body 116 and that flange has a diameter greater than the diameter of housing aperture 115. A spring means 120 is disposed between the housing 112 and the indicator body 116 and held in place by recess 121, collar 122 and sleeve 124, for urging the indicator body toward abutment aperture 109. Thus, when a tubular guide 4 (see Figure 1) or a canula 30 (see Figure 3) is passed through taper 100, gripping means 84, indicator aperture 110 and abuts reduced diameter 118 of indicator bore 117, with further movement of the canula or tubular guide toward the indicator end 114 of the housing 112, the indicator flange 119 is displaced (to the right as shown in the drawing) from the housing 112 and protruded from indicator end 114, which protrusion provides an indication that the canula or tubular guide has reached the reduced diameter 118 of indicator bore 117. Preferably, the end of the indicator bore 117 which connects the abutment aperture 109 has a centering taper 123, to assure smooth transition from the adaptor to the indicator by the tubular guide.

The connection head 5 (Figure 1) has a photocell device therein (not shown) which is actuated when flange 119 is moved axially outwardly of the indicator housing 112 (to the right shown in the drawing) which is a positive indicator that the adaptor is properly in place in connection head 5.

As can therefore be seen, a canula or tubular guide can be inserted into the adaptor at centering taper 100, passed through the gripping means 84, and into the indicator means 111 until it abuts reduced diameter 118. The gripping action on the canula or tubular guide will be the same as described in connection with Figures 4, 5 and 6, but in addition thereto, by further movement of the canula or tubular guide against reduced diameter 118, flange 119 will be moved outwardly of housing 112 (to the right as shown in the drawing) and cause actuation of the photocell device in head 5. Thus, the combination shown in Figure 7 not only grips the canula or tubular guide, in the manner described in Figures 4, 5 and 6, but also provides

a positive indication that the adaptor (with the indicator means of Figure 7) is correctly in place in connection head 5.

When the after-loading apparatus, including the positioning members, tubular guide, etc. are in place, the technician activates the drive cable to move the radioactive source to the site of the therapy. After sufficient exposure, for the particular treatment involved, of the radioactive source to the tissue being treated, the technician again activates the drive cable to remove the drive cable and the radioactive source back into the safe for the radioactive source. This is all done while the technician is not in close proximity to the patient being treated, e.g. in another room, in order to avoid radiation exposure by the technician. At this time, it is important for the comfort of the patient to also quickly disconnect the after-loading apparatus from positioning members, such as positioning members 20 (see Figure 2), from the patient, so that the patient can comfortably move or to quickly disconnect the tubular guides from the apparatus. With the present invention such disconnecting is easily achieved. In this regard, and for all of the embodiments discussed above, the positioning member or tubular guide is disconnected from the adaptor (or the adaptor-indicator combination) simply by digitally pressing collar 61 axially inwardly (see Figure 4) against spring 60 or pressing collar 94 against spring 91 (Figure 6) so as to move the gripping means 49 or 84 axially inwardly of the adaptor (to the right as shown on the drawings), which will of course allow flange 53 (see Figure 4) or flange 83 (see Figure 6) to be displaced to the opened position as discussed above. When in that open position, the tubular guide of the positioning member may simply be pulled from the adaptor (or from the adaptor-indicator combination -- see Figure 7) in one smooth easy movement. Thus, no manual removal of tubes or unscrewing of an adaptor and the like are required, and the time for disconnecting the tubular guide or the positioning member from the patient or the tubular guide from the apparatus with the present invention is far reduced from the time required with conventional adaptors, especially when multiple channels are used.

Thus, the invention provides adaptors for remote after-loading apparatus which are quick and easy to connect to the positioning member or tubular guide, which insure that these will not be compressed or distorted to cause binding of the drive cables, and which are quick and easy to disconnect once the therapy has been completed. This is a substantial improvement in the art and greatly facilitates the use of remote after-loading apparatus both in terms of accuracy of application of the radioactive source and comfort to the patient. A most important feature of the invention is the de-



sign of the present gripping means which will automatically grip the positioning member or tubular guide as it is passed therethrough and will also allow quick and easy disconnecting thereof after the therapy has been completed. Another important feature of the invention is the design wherein the abutment of the positioning member or tubular guide in the adaptor positively places the same for indexing the length of cable to be driven by the cable drive of the remote after-loading apparatus. Finally, an important feature of the invention is the indicator means for positively indicating that the tubular guide or positioning member is fully in place in the adaptor and the adaptor is fully in place in the head when the adaptor is used for connecting the tubular guide or the positioning member to the head of the remote after-loading apparatus. All of these features are most important and are substantial improvements in the art.

### Claims

1. In a remote, after-loading apparatus for brachy radiotherapy comprising a radioactive source, a safe for the source, a source drive cable, a guide member for guiding the cable to the site of radiotherapy, a connection head for connecting the guide member to the source drive cable, a positioning member for positioning the source at the site of the radiotherapy and adaptors for connecting the guide member to the connection head and/or to the positioning member, the improvement wherein at least one of the said adaptors comprises:

(1) an outer barrel having an opened end and a connector end and having a centrally extending barrel aperture therein;  
 (2) A sleeve having a first end and a second end and a sleeve passageway extending between said ends, and said sleeve being disposed within said barrel such that at least the first end of the sleeve is contained within said barrel;  
 (3) an elongated gripping means disposed through said sleeve passageway and extending beyond the ends of the said sleeve, said gripping means having:

(a) a gripping end and a receiving end;  
 (b) a gripping body extending from said gripping end to said receiving end;  
 (c) a flange disposed on said gripping end where the diameter of the flange is greater than a diameter of said sleeve passageway at the first end thereof;  
 (d) a tapered outer surface extending from said flange to a distant portion of said gripping body;  
 (e) a uniform diameter gripping means tube bore extending through said gripping means;

(f) at least two opposed slots passing through said flange and said gripping body and extending from said flange to at least said distant portion of said gripping body;

5 (g) said at least two slots forming at least two opposed gripping portions of said gripping means and said gripping portions being inwardly compressible when the said flange and gripping portions are in contact with the said first end of the sleeve so as to form a reduced diameter of said tube bore and thereby a closed position of the gripping portions, and said gripping portions being sufficiently resilient so that when the said flange and gripping portions are axially disposed from the said first end of the sleeve the gripping portions form at least the same diameter as the tube bore and thereby an open position;

10 (4) Spring means disposed between said gripping means and said sleeve for urging the said flange on the gripping means toward the said second end of the sleeve;

20 whereby the guide member may be moved into the receiving end of the gripping means, moved to an engagement with the said gripping portions in the said closed position, moved so as to cause the gripping means to be moved against said spring means axially outwardly from the first end of the said sleeve to a position where at least a portion of said tapered outer surface is spaced from the said first end of the sleeve and the flange and gripping portions are resiliently moved to said open position and allow passage of the guide member therethrough, and upon ceasing the movement of the guide member, the spring means urges the gripping means axially inwardly in the said sleeve so that a portion of the said tapered outer surface contacts the said first end of the sleeve and compresses the said gripping portions to a locked position around said guide member.

25 2. The apparatus of claim 1 wherein the said barrel aperture has an abutment in substantially the same configuration as that of said flange so that when the flange contacts the said abutment no further axial movement of said gripping means is achievable.

30 3. The apparatus of claim 2 wherein the abutment has an axially disposed abutment aperture therein which has a diameter substantially equal to that of the said tube bore for passing the said guide member therethrough.

35 4. The apparatus of claim 3 wherein the said abutment aperture has a centering taper.

40 5. The apparatus of claim 3 wherein the said abutment aperture connects with an indicator aperture in an indicator means, said indicator means having:

45 (a) an indicator housing with a connection end, an indicator end and an axially positioned housing

aperture which housing aperture connects with said indicator aperture;

(b) an indicator body disposed within said housing and within said indicator aperture and said indicator body connecting said connection end and said indicator end;

(c) an indicator bore passes through said indicator body with a portion of the indicator bore which is within the indicator aperture having the same diameter as the said gripping means tube bore and the remainder of the indicator bore having a reduced bore of a diameter which is less than the diameter of the said gripping means tube bore, whereby the said guide member may be moved through said adaptor, and into said indicator means to a position where said guide member contact said reduced bore;

(d) an indicator flange disposed of the indicator end of the indicator body, said flange having a diameter greater than the diameter of the housing aperture;

(e) spring means disposed between said housing and said indicator body for urging the indicator body towards said abutment aperture;

whereby when said guide member abuts the said reduced diameter and when the said guide member is axially moved toward said indicator end of the housing, the indicator flange is displaced from the housing and provides an indication that the said guide member has reached the said reduced diameter.

6. The apparatus of claim 5 wherein the end of the said indicator bore which connects with the said abutment aperture has a centering taper.

7. The apparatus of claim 1 wherein the said sleeve passageway has a tapered portion adjacent said first end and wherein the said tapered portion is of the same taper configuration as the tapered outer surface of the gripping means.

8. The apparatus of claim 1 wherein there is a recess in the sleeve passageway and the said spring means is disposed in the recess and held therein by the recess and the outer surface of the gripping means.

9. The apparatus of claim 8 wherein the spring means is a coiled spring.

10. The apparatus of claim 9 wherein the coiled spring surrounds the gripping means.

11. The apparatus of claim 1 wherein the tube receiving end of the gripping means has a centering taper surrounding said gripping means tube bore.

12. The apparatus of claim 1 wherein the said flange has a diameter slightly less than a diameter of the said barrel aperture.

13. The apparatus of claim 1 wherein the said tapered outer surface of the gripping means is a straight or curved taper.

14. The apparatus of claim 13 wherein the said

taper is a straight taper.

15. The apparatus of claim 1 wherein there are three slots and three gripping portions.

16. The apparatus of claim 15 wherein the slots are 120° apart and the gripping portions are of equal size.

17. The apparatus of claim 1 wherein there are four slots and four gripping portions.

18. The apparatus of claim 17 wherein the slots are 90° apart and the gripping portions are of equal size.

19. The apparatus of claim 1 wherein the slots extend to at least one-quarter of the length of the gripping body.

20. The apparatus of claim 19 wherein the slots extend to at least one-half the length of the gripping body.

21. The apparatus of claim 1 wherein the said distant portion of the gripping body to which the said taper extends is a distance from the flange which is at least equal to the diameter of the gripping means bore.

22. The apparatus of claim 21 wherein the said distance is at least equal to twice the diameter of the gripping means bore.

30

35

40

45

50

55

FIG. 1

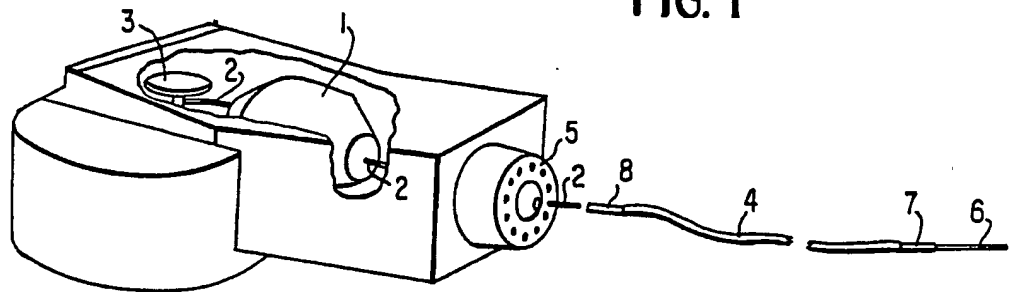


FIG. 2

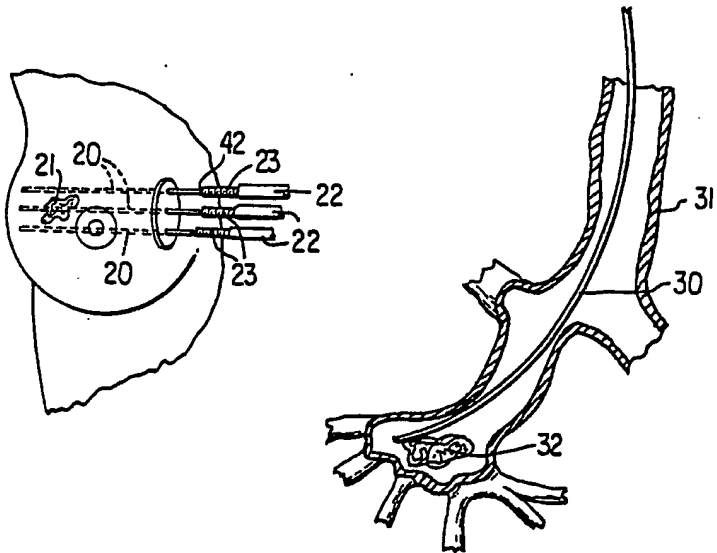


FIG. 3

FIG. 4

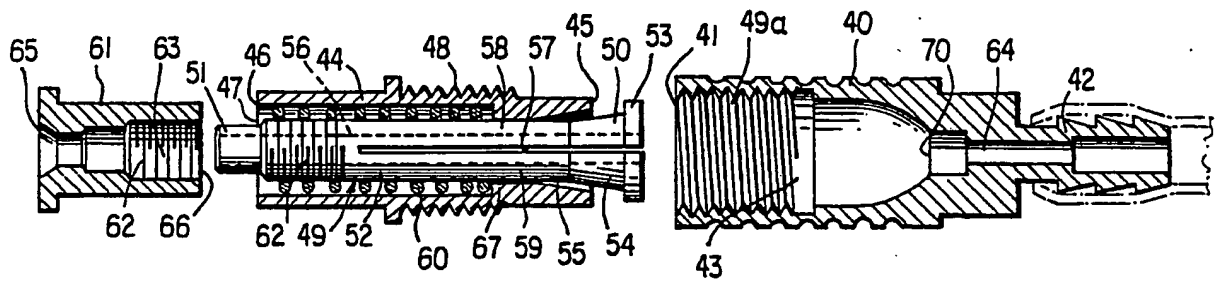


FIG. 5

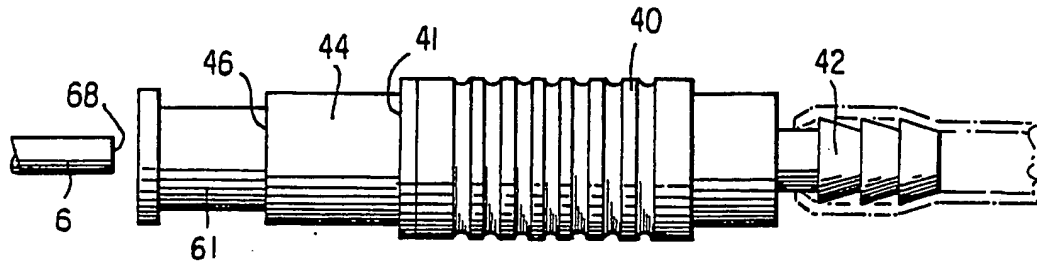


FIG. 6


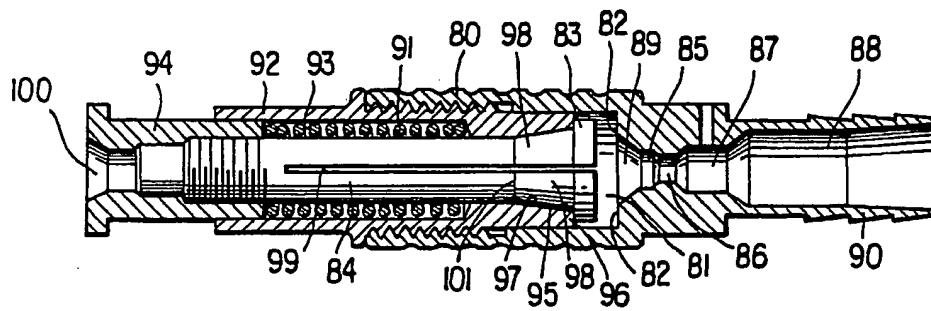


FIG. 7





Europäisches Patentamt  
European Patent Office  
Office européen des brevets

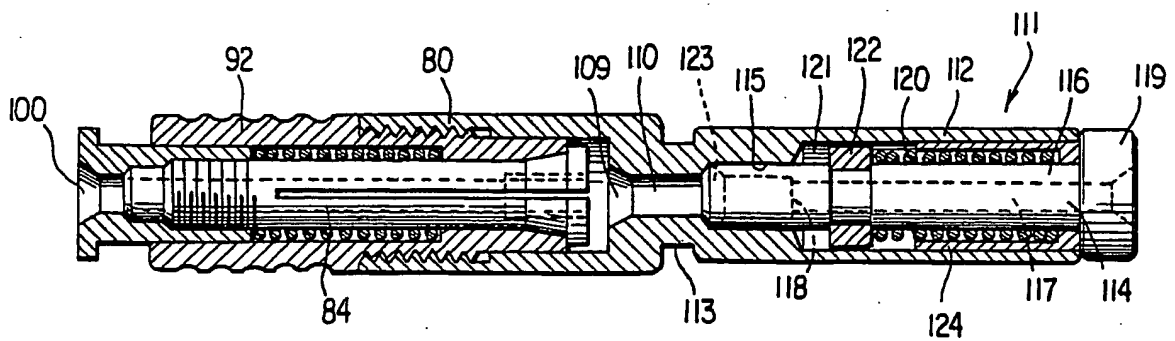

Publication number:

**0 366 214 A3**

(12)

## EUROPEAN PATENT APPLICATION

(21) Application number: 89202710.3

(51) Int. Cl.<sup>5</sup>: **A61N 5/10**, **A61M 36/00**,  
**A61B 6/00**

(22) Date of filing: 27.10.89

(30) Priority: 28.10.88 US 263937

(43) Date of publication of application:  
02.05.90 Bulletin 90/18

(64) Designated Contracting States:  
**AT BE CH DE ES FR GB GR IT LI LU NL SE**

(66) Date of deferred publication of the search report:  
26.02.92 Bulletin 92/09

(71) Applicant: Van 't Hooft, Eric  
Gezichtslaan 16  
NL-3956 BB Leersum(NL)

(72) Inventor: van t' Hooft, Eric  
Gezichtslaan 16  
NL-3956 BB Leersum(NL)  
Inventor: van Zwol, Libbe  
Dreef 5  
NL-3956 EP Leersum(NL)


(74) Representative: Smulders, Theodorus A.H.J.,  
I.r. et al  
Vereenigde Octroolbureaux Nieuwe Parklaan  
107  
NL-2587 BP 's-Gravenhage(NL)

(54) Improved adaptor for remote after-loading apparatus for radiotherapy.

(57) The adaptor for connecting a guide member in a remote after-loading apparatus for radiotherapy is provided. The adaptor comprises an outer barrel (80) having an opened end, a connector end and a centrally extending aperture. A sleeve (92) passes through the aperture of the barrel such that at least a first end of the sleeve is contained within the barrel. An elongated gripping means (84) is disposed through the sleeve and extends beyond the ends of the sleeve. The gripping means has a gripping end and a receiving end, a gripping body extending between the ends, and a flange (83) disposed on the gripping end with the diameter of the flange being greater than the diameter of the sleeve. A tapered outer surface (95) extends from the flange to a distant portion of the gripping body. A uniform diameter tube bore is disposed through the gripping means and at least two slots (99) pass through the flange and at least a portion of the gripping body. Those slots form at least two opposed gripping portions which are inwardly compressible when the flange and the gripping portions are in contact with the first end of the sleeve, so as to form a reduced diameter of the tube bore and thereby a closed

position of the gripping portions. The gripping portions are sufficiently resilient so that when the flange and the gripping portions are disposed from the first end of the sleeve, the gripping portions form at least the same diameter as the tube bore and thereby an open position. Spring means (41) are disposed between the gripping means in the sleeve for urging the flange of the gripping means toward the second end of the sleeve.

FIG. 6

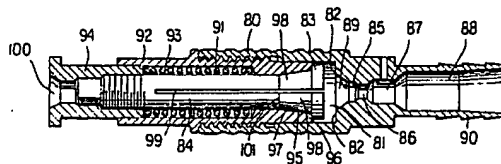

EP 0 366 214 A3



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number

DOCUMENTS CONSIDERED TO BE RELEVANT			EP 89202710.3
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 8) <sup>4</sup>
A	<u>DE - A - 3 643 902</u> (BUCHLER) * Fig. 4, 5 * --	1	A 61 N 5/10 A 61 M 36/00 A 61 B 6/00
A	<u>US - A - 3 861 380</u> (CHASSAGNE) * Fig. 2 * --	1	
A	<u>EP - A - 0 158 630</u> (SEIBERSDORF) * Fig. 6 * --	1	
D, A	<u>US - A - 4 881 938</u> (VAN'T HOOFT) * Fig. 6 * & EP-A2-0 152 124 --	1	
A	<u>US - A - 2 784 987</u> (CORCORAN) * Fig. 5 * -----	1	
			TECHNICAL FIELDS <sup>4</sup> SEARCHED (Int. Cl. 8)
			A 61 B A 61 N A 61 M F 16 L
The present search report has been drawn up for all claims			
Place of search VIENNA		Date of completion of the search 18-12-1991	Examiner BAUMGARTNER
<b>CATEGORY OF CITED DOCUMENTS</b> X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons A : member of the same patent family, corresponding document			

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) Publication number:

**0 366 214 B1**

(12)

## EUROPEAN PATENT SPECIFICATION

- (45) Date of publication of patent specification: 27.09.95 (51) Int. Cl.<sup>6</sup>: **A61N 5/10**, A61M 36/00,  
A61B 6/00
- (21) Application number: 89202710.3
- (22) Date of filing: 27.10.89

(54) Improved adaptor for remote after-loading apparatus for radiotherapy.

- (30) Priority: 28.10.88 US 263937
- (43) Date of publication of application:  
02.05.90 Bulletin 90/18
- (45) Publication of the grant of the patent:  
27.09.95 Bulletin 95/39
- (64) Designated Contracting States:  
AT BE CH DE ES FR GB GR IT LI LU NL SE
- (66) References cited:  
EP-A- 0 158 630  
DE-A- 3 643 902  
US-A- 2 784 987  
US-A- 3 861 380  
US-A- 4 881 938

- (73) Proprietor: Van 't Hooft, Eric  
Gezichtslaan 16  
NL-3956 BB Leersum (NL)
- (72) Inventor: van t' Hooft, Eric  
Gezichtslaan 16  
NL-3956 BB Leersum (NL)  
Inventor: van Zwol, Libbe  
Dreef 5  
NL-3956 EP Leersum (NL)
- (74) Representative: Smulders, Theodorus A.H.J.,  
Ir. et al  
Vereenigde Octrooibureaux  
Nieuwe Parklaan 97  
NL-2587 BN 's-Gravenhage (NL)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

**EP 0 366 214 B1**

## Description

The present invention relates to an improvement in a remote after-loading apparatus for brachytherapy, e.g. interstitial, intracavitary and intraluminal radiotherapy, and more particularly, to adaptors for such apparatus.

Brachy therapy has become of increased importance in the treatment of certain diseases, especially cancer, in that the radiotherapy can be administered to very localized human body areas, as opposed to broad beam radiotherapy. To achieve this localized radiotherapy, a radioactive source must be placed in close proximity to the tissue being treated, since the radioactive source effects only low levels of radiation at a significant distance from the source, while high levels of radiation are effected near the source, i.e. the application of the inverse square of the distance law. The application of the radiotherapy is normally achieved by guiding a radioactive source through at least one guide member, e.g. a position member or a tubular guide, until that source reaches the site of the tissue to be treated, e.g. cancerous tissue. A regimen of radiation is then administered according to a program defined for the particular cancerous tissue and that therapy is, usually, periodically repeated until effective control of the cancerous tissue is achieved.

However, since radiation is involved in the therapy, technicians who routinely administer the therapy to a number of patients would be unduly exposed to radiation in the conduct of those therapies if the technician were in close proximity to the patient being treated. To avoid such radiation hazard to the technician, apparatus has been developed for allowing the radiation source to be moved to the site of the radiotherapy while the technician is not in close proximity to the patients being treated, e.g. is not in the treatment room where the patient is being treated. Such apparatus is known in the art as remote after-loading apparatus for brachy therapy. When using such apparatus, a physician places a positioning member, e.g. a needle or canula, at the site where radiotherapy is to be effected. This positioning member is attached to one end of a tubular guide and the tubular guide is attached at the other end thereof to a connection head of the remote after-loading apparatus. After such positioning and connections are made, a technician, from a remote location, e.g. another room, can cause the apparatus to drive a cable with a radioactive source attached thereto from a "safe", through the remote after-loading apparatus, the guide member, e.g. tubular guide, and into the positioning member for radiotherapy. Thus, a technician will not be in close proximity to the patients, e.g. will be in another room, while the

radioactive source is out of the "safe" and while administering the therapy.

An apparatus of the above nature is known from EP-A-0 158 630. A particular problem in connection therewith has been the adaptors for connecting the guide member, e.g. tubular guide, and/or the positioning member to the connection head of the remote after-loading apparatus or attaching the one to the other. For example, since the cable, with the radioactive source, must slide through the tubular guide, and the tubular guide is quite small, any kinking, compressed configuration, or the like of the flexible plastic tubular guide, caused by the adaptor, can cause the cable moving the radioactive source to bind therein, which results in a failure of moving the radioactive source to the correct site for effective radiotherapy. Thus, the adaptors have been a constant problem in the art. In addition, once the positioning member is in place in the patient, it is important to quickly and effectively connect the tubular guide to the positioning member or the positioning member to the connection head so as to minimize delay and discomfort to the patient.

The object of the invention is to provide improved adaptors for connecting the tubular guide or positioning member to the connection head or to each other wherein the adaptors allow for quick and easy connections without other laborious attachments, and where such connections avoiding distortion or compression of the tubular guide or positioning member so as to avoid the kinking, binding and the like by the cable.

The invention relates to a remote, after-loading apparatus for brachy radiotherapy which, as known from EP-A-0 158 630, comprises a radioactive source, a safe for the source, a source drive cable, a guide member for guiding the cable to the site of radiotherapy, a connection head for connecting the guide member to the source drive cable, a positioning member for positioning the source at the site of the radiotherapy and adaptors for connecting the guide member to the connection head and/or to the positioning member, at least one of the said adaptors comprising:

- (1) an outer barrel having an opened end and a connector end and having a centrally extending barrel aperture therein;
- (2) a sleeve having a first end and a second end and a sleeve passageway extending between said ends, and said sleeve being disposed within said barrel such that at least the first end of the sleeve is contained within said barrel;
- (3) an elongated gripping means disposed through said sleeve passageway and extending beyond the ends of the said sleeve, said gripping means having:
  - (a) a gripping end and a receiving end;



(b) a gripping body extending from said gripping end to said receiving end;

(c) a flange disposed on said gripping end where the diameter of the flange is greater than a diameter of said sleeve passageway at the first end thereof;

(d) a tapered outer surface extending from said flange to a distant portion of said gripping body;

(e) a uniform diameter gripping means tube bore extending through said gripping means;

(f) at least two opposed slots passing through said flange and said gripping body and extending from said flange to at least said distant portion of said gripping body;

(g) said at least two slots forming at least two opposed gripping portions of said gripping means and said gripping portions being inwardly compressible when the said flange and gripping portions are in contact with the said first end of the sleeve as to form a reduced diameter of said tube bore and thereby a closed position of the gripping portions, and said gripping portions being sufficiently resilient so that when the said flange and gripping portions are axially disposed from the said first end of the sleeve the gripping portions form at least the same diameter as the tube bore and thereby an open position.

Elimination of the above discussed problems is according to the present invention achieved by spring means disposed between said gripping means and said sleeve as well as between a shoulder on said gripping means and a flange within said sleeve, whereby the guide member may be moved into the receiving end of the gripping means, moved to an engagement with the said gripping portions in the said closed position, moved so as to cause the gripping means to be moved against said spring means axially outwardly from the first end of the said sleeve to a position where at least a portion of said tapered outer surface is spaced from the said first end of the sleeve and the flange and gripping portions are resiliently moved to said open position and allow passage of the guide member therethrough, and upon ceasing the movement of the guide member, the spring means urges the gripping means axially inwardly in the said sleeve so that a portion of the said tapered outer surface contacts the said first end of the sleeve and compresses the said gripping portions to a locked position around said guide member.

By this arrangement, the guide member may be very quickly inserted into the adaptor and locked in place by that insertion in such a manner that the guide member is not substantially com-

pressed, and thereby avoids kinking and binding and the like of the source drive cable.

Figure 1 is a diagrammatic view of the basic parts of a conventional remote after-loading apparatus for brachy therapy.

Figure 2 is a diagrammatic illustration of positioning members positioned for treatment of breast cancer and showing the positioning members being connected via adaptors to tubular guides (one of the embodiments of the invention).

Figure 3 is a diagrammatic illustration of a positioning member in position for treating lung cancer.

Figure 4 is an exploded view, partly in cross section, of an embodiment of the adaptor of the present invention.

Figure 5 is an assembled view of Figure 4.

Figure 6 is a view of a preferred embodiment of the present adaptor, which view is partially in cross section.

Figure 7 is a view of a further preferred embodiment of the present adaptor, having an indicator connected therewith, and that view is partially in cross section.

While remote after-loading apparatus for brachy therapy, e.g. intracavitary intraluminal and interstitial radiotherapy, is well known in the art (see for example applicant's US-A-4 881 937 and US-A-4 881 938, the entire disclosures of which are incorporated herein by reference), and need not be described in detail herein for sake of conciseness, for context purpose, a typical arrangement of such apparatus is shown in Figure 1. The basic parts of a typical apparatus are as follows. A radioactive source (not shown in the drawings) is contained in a safe 1 which protects technicians from radiation while working with the apparatus. A source drive cable 2 is driven by a source drive mechanism 3. To position the radioactive source at the site of the therapy a guide member, e.g. a tubular guide 4 is as disposed so as to guide the drive cable 2 to the site of the radiotherapy. It should be understood in this regard that the patient being treated will be in proximity to the remote after-loading apparatus and may be conveniently sitting in a chair or lying on a bed, depending primarily upon the particular radiotherapy being administered. Thus, the tubular guide is necessary for guiding the drive cable 2 with the radioactive source from the safe to the site of treatment. A connection head 5 connects one or more of tubular guides 4 to one or more of source drive cables and these one or more connections are referred to as "channels." As noted above, for some applications, the positioning member may extend from the site to be treated to the connection head 5, and in this form the positioning member includes the guide member, but for sake of conciseness, the embodiment where the positioning

member and the guide member are separate, i.e. utilizing a tubular guide will be mainly discussed. It will be appreciated that in any one therapy one or a number of radioactive sources may be used at one time, and the use of more than one source necessitates a like number of tubular guides 4 connected to connection head 5. Only one tubular guide 4, and hence only one "channel", is shown in Figure 1 for clarity. A positioning member 6 is placed by a physician for the radiotherapy (as shown in more detail in Figures 2 and 3, discussed below) and that positioning member is connected to tubular guide 4 by way of an adaptor 7. An adaptor 8 also connects tubular guide 4 to connection head 5.

While not shown in the drawings, such apparatus may also have a check cable, driven by check cable drive. The check cable is used to test the connections of the apparatus to the patient prior to moving the radioactive source from the safe to the patient. The check cable insures that all connections are operating properly and that the positioning members are correctly in place before the radioactive source is removed from the safe. Additionally, such apparatus may have an automatic calibration device (not shown in the drawings) for calibrating the excursion of the cable to insure that the cable has reached the correct position at the therapy site. Further, such apparatus may have an indexer for indexing the cables, especially where a plurality of cables are used for multiple radioactive source therapy. Finally, such apparatus may have an optical verification device (not shown in the drawings) for verifying that the adaptor 8 is properly connected to connection head 5. These verification devices usually consist of an electric eye which senses a portion of the adaptor 8 when that adaptor is placed in connection head 5.

Figure 2 shows positioning members 20, which can take the form of needles, tubes, canula, or the like, placed about a breast cancer 21 by a physician. Positioning members 20 are connected to tubular guides 22 by adaptors 23 (in this illustration, three "channels" are used).

Figure 3 shows a positioning member 30, in the form of a canula, inserted in the bronchus 31 for treating a lung cancer 32. In this embodiment, the canula 30 may extend from the head 5 to the cancer 32 and as such the canula 30 functions as both the tubular guide and the positioning member. Hence, the canula 30 need only have an adaptor for connecting the canula 30 to head 5, as briefly noted above.

Figures 2 and 3 are simply diagrammatic illustrations of typical arrangements for radioactive therapy using a remote after-loading apparatus. However, similar arrangements can be used for treating the oesophagus, the head and neck, the

oral cavity, the brain, the cervix, the endometrium, the prostate, the bladder, the bowel duct, and the nasopharynx, among others. The various arrangements for treating the various body parts varies with the particular treatment, but all of the arrangements have in common the basic parts of the remote after-loading apparatus, as described above. Thus, no further explanation of the known remote after-loading apparatus for radiotherapy need be described herein, and more details can be found in the brochure MICROSELECTRON HDR <sup>192</sup>Ir published by Nucletron International BV, Leersum, The Netherlands, the entire disclosure of which is incorporated herein by reference. Additional disclosure may be found in the publication MICROSELECTRON LDR/MDR <sup>192</sup>Ir <sup>137</sup>Cs published by Nucletron Trading BV, Leersum, The Netherlands, the entire disclosure of which is incorporated herein by reference.

As noted above, a major problem in connection with the use of such apparatus has been in regard to the adaptors 7 and 8 (see Figure 1) for connecting guide members, e.g. tubular guide 4 to the positioning member 6 and to the connection head 5. Also, as noted, typically the prior art used metal tubes for making such attachments of the guide member, e.g. tubular guide 4 to the adaptors. The guide member is quite small, especially guide members in the form of a canula for bronchus application, which canula extends from the site of therapy to the connection head 5 and such guide members are typically no more than two millimeters in diameter, with a lumen which is less than about 1.8 millimeters. As can be appreciated, using conventional adaptors, as explained above, and the like for attaching such small tubular guides to the adaptors requires fine and intricate work, and such work considerably slows down the attachment of the tubular guide to the positioning member, once the positioning member is in place in the patient, and delays attaching the tubular guide to the connection head 5 of the after-loading apparatus. When multiple "channels" are used, considerable delays are experienced. Further, in view of such small diameters, it is easy to unduly distort or compress the tubular guide with such adaptors and such distortion or compression can cause kinking or binding of the source drive cable when passing therethrough. The clearance between the lumen of the tubular guide and the source drive cable is kept small so that the source drive cable may be driven through that lumen, even in complex configurations, without kinking. The probability of such distortion or compression of the tubular guide with such conventional adaptors makes conventional adaptors a serious problem in the art of the remote after-loading apparatus.

The invention provides an adaptor which can be used for connecting the tubular guide to the connection head and the positioning member, as shown in Figure 1, or the positioning member to the tubular guide, as shown in Figure 2, or the tubular guide, in the form of a canula, to the connection head, as shown in Figure 3, in a fast and efficient manner and with virtually no possibility of unduly compressing or distorting the tubular guide and thus avoids kinking or binding of the source drive cable while passing therethrough. The invention is based upon clamping the tubular guide with compressible members so that the compression of the tubular guide within those members is essentially uniform around the circumference of the tubular guide being attached. Further, the invention is based on the attachment of the tubular guide to the adaptor being made simply by inserting the tubular guide into the adaptor, with which insertion the clamping by the adaptor automatically occurs. As can be appreciated, by providing that the compressive clamping around the tubular guide is essentially uniform around the circumference thereof, no undue compression or distortion of the tubular guide will occur and the lumen of the tubular guide will remain essentially circular, as opposed to prior art adaptor means. When the lumen remains essentially circular, there is a considerably reduced risk of the source drive cable binding or kinking while being passed from the remote after-loading apparatus to the site of therapy. Also, as will be appreciated, with the clamping device being actuated simply by inserting the very small tubular guide into the adaptor, it is very easy to make connections between the tubular guide and the positioning member and the tubular guide and the connection head, once the positioning member has been placed in the patient by the physician. This allows quick and efficient use of the apparatus, and minimizes delays and discomfort to the patient.

The principle of the present adaptor is shown in Figure 4. The adaptor has an outer barrel 40 having an opened end 41 and a connector end 42. In this embodiment, the connector end 42 is previously attached to the tubular guide 4 (see Figure 1) and the adaptor will in turn connect to a positioning member 20 (see Figure 2). The barrel 40 also has a centrally extending aperture 43 therein. A sleeve 44 has a first end 45, a second end 46 and a passageway 47 extending between those two ends 45 and 46. The sleeve is configured so that it may be disposed within barrel 40 (Figure 4 is an exploded view) such that at least the first end 45 of the sleeve 44 is contained within the barrel 40.

While various modes of manufacture may be employed, for simplicity in illustrating the invention in Figure 4, sleeve 44 is secured in barrel 40 by threads 48 of the sleeve 44 and threads 49a of

barrel 40. Other modes of assembly may be used, and the modes of assembly are not critical. However, if threaded assemblies, such as that shown in Figure 4, are used, it is preferable that the assembly be firmly affixed together, e.g. by soldering or by use of a joint compound such as LOCKTITE, so that it may not be taken apart, in order to avoid damage to the connector.

An elongated gripping means, generally, 49 is disposed through sleeve passageway 47 and extends beyond ends 45 and 46 of the sleeve 44. The gripping means has a tubular guide gripping end 50 and a tubular guide receiving end 51. A gripping body 52 extends from the gripping end 50 to the receiving end 51. A flange 53 is disposed on gripping end 50 and the diameter of the flange is greater than the diameter of the sleeve passageway 47 at the first end 45 of sleeve 44 so that the axial excursion of the gripping means 49 to the left as shown in the drawing is limited when flange 53 contacts the first end 45 of sleeve 44. A tapered outer surface 54 extends from flange 53 to a distant portion 55 on the gripping body. A uniform diameter gripping means tube bore 56 extends through the gripping means 49. There are at least two opposed slots 57 (one shown in Figure 4) passing through the flange 53 and the gripping body 52 and these slots extend from the flange to at least a distant portion 55 of the gripping body, although preferably these slots extend therebeyond, as shown in Figure 4 and as explained more fully hereinafter. The at least two opposed slots 57 form at least two opposed gripping portions 58 and 59 of the gripping means 49 and the gripping portions 58 and 59 are inwardly compressible when the flange 53 and the gripping portions 58 and 59 are in contact with the first end 45 of sleeve 44, so as to form a reduced diameter of the tube bore 56 of that portion of gripping means 49, and thereby forms a closed position of the gripping portions 58 and 59. The gripping portions 58 and 59, by virtue of slots 57 are also sufficiently resilient so that when the flange 53 and the gripping portions 58 and 59 are axially disposed from the first end 45 of sleeve 44 (to the right as shown in Figure 4) that the gripping portions 58 and 59 form an opening having at least the same diameter as the tube bore 56 and thereby, also, forms the open position of gripping portions 58 and 59.

Spring means 60 are disposed between the gripping means 49 and sleeve 44 for urging flange 53 of the gripping means 49 toward the second end 46 of sleeve 44.

As noted above, the embodiment of Figures 4 and 5, for illustrative purposes, shows the assembly by threads, although other assemblies may be used. However, for completing the assembly shown

in Figures 4 and 5, a guide tube collar 61 is threaded onto gripping means 49 by threads 62 on both the gripping means 49 and collar 61. The collar 61 has an aperture 63 which communicates with tube bore 56 of gripping means 49, and when assembled, tube bore 56 also communicates with barrel bore 64 of barrel 40 such that there is a continuous communication through collar 61, gripping means 49 and barrel 40. This continuous communication forms a passageway through the adaptor for the tubular guide and positioning member, through which the source drive cable 2 passes. To facilitate the insertion of the positioning member 6 (see Figures 1 and 5) into the adaptor, collar 61 has a taper 65 for ease of insertion thereinto.

It will also be seen that when the arrangement of Figure 4 is in an assembled position, spring 60 will be held in place by being between sleeve 44 and gripping means 49, as well as between shoulder 66 of collar 61 and flange 67 of sleeve 44. With the spring so restrained, it will urge collar 61 axially to the left as shown in the drawings, and since collar 61 is attached to gripping means 49, gripping means 49 will likewise be urged axially to the left as shown in the drawings and cause flange 53 to seat against first end 45 of sleeve 44, thus causing the gripping portions 58, 59 to be resiliently moved radially inwardly and form a diameter less than the diameter of bore 56, i.e., the closed position thereof.

When it is desired to attach a positioning member 6, such as a canula, to the adaptor, the end 68 thereof (see Figure 5) is placed into taper 65 (see Figure 4) and passed through aperture 63 of collar 61, through the receiving end 51 of the gripping means 49, and subsequently through tube bore 56 of gripping means 49 until it reaches the distant portion 55 of gripping means 49. At that point, the diameter of tube bore 56 is less than the diameter of canula 6 and end 68 thereof will abut the reduced diameter portion of tube bore 56 (the closed position of the gripping means). However, with further movement of canula 6, gripping means 49 is displaced against spring 60 and axially outwardly of first end 45 of sleeve 44 (to the right as shown in the drawings) and as the tapered outer surface 54 clears first end 45, gripping portions 58 and 59, no longer being compressed within first end 45, will expand to a diameter at least the same as the diameter as that of bore 56 and canula 6. With continued movement of canula 6, the end 68 thereof will pass through gripping means 49 and finally will abut the entrance 70 of barrel bore 64, where end 68 will come to a stop. When that occurs, spring 60 will urge gripping means 49 and flange 53 axially toward second end 46 of sleeve 44 and cause gripping portions 58, 59 to again be com-

pressed by first end 45 of sleeve 44 around canula 6. This will, of course, cause a gripping action by gripping portions 58, 59 on canula 6 and lock the canula 6 in that position. That lock will be most secure, since any movement of canula 6 to the left, as shown in the drawings, will cause gripping portions 58, 59 to be further compressed by first end 45 and will cause further gripping and locking of canula 6 in that position.

Thus, the canula may be moved into the receiving end 51 of the gripping means 49 and moved to an engagement with the gripping portions 58, 59 which are in the closed position. Further movement of canula 6 causes the gripping means to be moved against spring means 60 axially outwardly from the first end 45 of sleeve 44 to a position where at least a portion of the tapered outer surface 54 is spaced from the first end 45 of sleeve 44 and the flange 53 and gripping portions 58, 59 are resiliently moved to an open position. This allows passage of canula 6 therethrough and upon ceasing the movement of canula 6, the spring means 60 urges the gripping means 49 and flange 53 axially inwardly in sleeve 44 so that a portion of the tapered outer surface 54 contacts first end 45 of sleeve 44 and compresses the gripping portions 58, 59 to a locked or closed position around canula 6.

The present adaptor can be further understood from Figure 6 which is similar to the embodiment of Figure 4 but shows certain components in more detail and shows a preferred embodiment of the invention. As opposed to barrel aperture 43 in Figure 4, as shown in Figure 6, barrel 80 has an aperture 81 that ends in an abutment 82 in substantially the same configuration as that of flange 83. Thus, flange 83, when moving to the right as shown in the drawing (when canula 6 -- not shown in Figure 6 -- is being passed therethrough) will contact abutment 82 so that flange 83 can move no further axially out of barrel 80 (to the right as shown in the drawing) and, likewise, no further axial movement (to the right as shown in the drawing) of the gripping means 84 (shown in side view-not in section) is achievable. This configuration provides a positive and very precisely determined stop for the gripping means 84. Also, it will be noted that abutment 82 has an axially disposed abutment aperture 85 therein which has a diameter equal to that of the tube bore (or canula 6) for passing canula 6 therethrough. Abutment aperture 85 has a second abutment 86, the shoulders of which are less than the diameter of canula 6, so that when the canula 6 contacts second abutment 86, it comes to a positive stop. Therefore, the exact position of the canula 6 can be determined from the present adaptor. Further apertures 87 and 88 complete the communication through the adaptor. Preferably,

abutment aperture 85 has a centering taper 89 so as to center canula 6 as it passes therethrough. As noted, the abutment aperture 86 is in communication with canula 6 which is in turn in communication with a conventional coupling 90 which can be attached to various devices, such as a tubular guide as described above.

The embodiment of Figure 6 differs from the embodiment of Figure 4, also, in that spring 91 is restrained within sleeve 92 and a recess 93 which cooperates with collar 94. Also, there is a tapered portion 95 adjacent the first end 96 of sleeve 92 (the taper is shown in Figure 4 but is not discussed in connection therewith). That tapered portion 95 is of the same taper configuration as the tapered outer surface 97 of gripping means 84. This allows a more positive opening and closing of opposed gripping portions 98 for a more positive release and locking of the tubular guide. Preferably, the spring means 60, in Figure 4, and 91 in Figure 6, is a coiled spring, although other spring arrangements may be used, and more preferably, the coiled springs surrounds the gripping means, as shown in Figures 4 and 6.

Also, in Figure 6, collar 94 has a centering taper 100, similar to the taper 65 in Figure 4, so that the receiving end of the gripping means can be easily contacted with a positioning member 6, such as a canula, when being inserted therein.

The tapered outer surfaces 54 and 97 of the gripping means 49 and 84 are shown in Figures 4, 5 and 6 as straight tapers. However, in lieu thereof curved tapers may be used, but straight tapers are preferred. Also, while, of course, there must be at least two opposed slots 57 and 99 in gripping means 49 and 84 (see Figures 4 and 6), so as to provide at least two opposed gripping portions 50 and 98, preferably, there are at least three such slots and, corresponding three gripping portions. More preferably, the slots are at 120° apart and the gripping portions are of equal size. However, a better and more positive gripping action can be achieved, with even less tendency to compress or distort the tubular guide, when there are at least four slots and four opposed gripping portions, and particularly, when the slots are 90° apart and the gripping portions are of equal size. Further, to achieve the best gripping action of the gripping means, the slots extend to at least one-quarter of the length of the gripping body and more preferably the slots extend to at least one-half the length of the gripping body. Likewise, to insure reasonable gripping of the canula 6, the distant portions 55 and 101 of the gripping body 52 and 84 (see Figures 4 and 6) to which the tapers extend is a distance from the flange which is at least equal to the diameter of the gripping means bore, and, more preferably, at least twice that diameter.

The embodiment shown in Figure 7 is similar to that shown in Figure 6, with the major exception that the embodiment of Figure 7 also has associated therewith an indicator means and may be used to connect either a tubular guide or a canula to head 5 (see Figure 1). In Figure 7 the abutment aperture 109 connects with an indicator aperture 110 in indicator means, generally, 111. The indicator means has an indicator housing 112 with a connection end 113, usually in the shape of a groove or sleeve, and an indicator end 114. Axially positioned in housing 112 is a housing aperture 115 which housing aperture connects with the indicator aperture 110. An indicator body 116 is disposed within housing 112 and within the housing aperture 115. Indicator body 116 connects indicator end 114 and connection end 113. An indicator bore 117 passes through the indicator body with a portion of the indicator bore 117 which is within the indicator aperture 110 having the same diameter as the diameter of the tube bore of gripping means 84 and the remainder of the indicator bore 117 having a reduced bore 118 of a diameter which is less than the diameter of the tube bore of gripping means 84 so that the tubular guide or canula may be moved through the adaptor and into the indicator means to a position where the tubular guide or canula contacts the reduced diameter 118 of the indicator bore 117.

An indicator flange 119 is disposed at the indicator end 114 of the indicator body 116 and that flange has a diameter greater than the diameter of housing aperture 115. A spring means 120 is disposed between the housing 112 and the indicator body 116 and held in place by recess 121, collar 122 and sleeve 124, for urging the indicator body toward abutment aperture 109. Thus, when a tubular guide 4 (see Figure 1) or a canula 30 (see Figure 3) is passed through taper 100, gripping means 84, indicator aperture 110 and abuts reduced diameter 118 of indicator bore 117, with further movement of the canula or tubular guide toward the indicator end 114 of the housing 112, the indicator flange 119 is displaced (to the right as shown in the drawing) from the housing 112 and protruded from indicator end 114, which protrusion provides an indication that the canula or tubular guide has reached the reduced diameter 118 of indicator bore 117. Preferably, the end of the indicator bore 117 which connects the abutment aperture 109 has a centering taper 123, to assure smooth transition from the adaptor to the indicator by the tubular guide.

The connection head 5 (Figure 1) has a photocell device therein (not shown) which is actuated when flange 119 is moved axially outwardly of the indicator housing 112 (to the right shown in the drawing) which is a positive indicator that the

adaptor is properly in place in connection head 5.

As can therefore be seen, a canula or tubular guide can be inserted into the adaptor at centering taper 100, passed through the gripping means 84, and into the indicator means 111 until it abuts reduced diameter 118. The gripping action on the canula or tubular guide will be the same as described in connection with Figures 4, 5 and 6, but in addition thereto, by further movement of the canula or tubular guide against reduced diameter 118, flange 119 will be moved outwardly of housing 112 (to the right as shown in the drawing) and cause actuation of the photocell device in head 5. Thus, the combination shown in Figure 7 not only grips the canula or tubular guide, in the manner described in Figures 4, 5 and 6, but also provides a positive indication that the adaptor (with the indicator means of Figure 7) is correctly in place in connection head 5.

When the after-loading apparatus, including the positioning members, tubular guide, etc. are in place, the technician activates the drive cable to move the radioactive source to the site of the therapy. After sufficient exposure, for the particular treatment involved, of the radioactive source to the tissue being treated, the technician again activates the drive cable to remove the drive cable and the radioactive source back into the safe for the radioactive source. This is all done while the technician is not in close proximity to the patient being treated, e.g. in another room, in order to avoid radiation exposure by the technician. At this time, it is important for the comfort of the patient to also quickly disconnect the after-loading apparatus from positioning members, such as positioning members 20 (see Figure 2), from the patient, so that the patient can comfortably move or to quickly disconnect the tubular guides from the apparatus. With the present invention such disconnecting is easily achieved. In this regard, and for all of the embodiments discussed above, the positioning member or tubular guide is disconnected from the adaptor (or the adaptor-indicator combination) simply by digitally pressing collar 61 axially inwardly (see Figure 4) against spring 60 or pressing collar 94 against spring 91 (Figure 6) so as to move the gripping means 49 or 84 axially inwardly of the adaptor (to the right as shown on the drawings), which will of course allows flange 53 (see Figure 4) or flange 83 (see Figure 6) to be displaced to the opened position as discussed above. When in that open position, the tubular guide of the positioning member may simply be pulled from the adaptor (or from the adaptor-indicator combination -- see Figure 7) in one smooth easy movement. Thus, no manual removal of tubes or unscrewing of an adaptor and the like are required, and the time for disconnecting the tubular guide or the positioning member from

the patient or the tubular guide from the apparatus with the present invention is far reduced from the time required with conventional adaptors, especially when multiple channels are used.

Thus, the invention provides adaptors for remote after-loading apparatus which are quick and easy to connect to the positioning member or tubular guide, which insure that these will not be compressed or distorted to cause binding of the drive cables, and which are quick and easy to disconnect once the therapy has been completed. This is a substantial improvement in the art and greatly facilitates the use of remote after-loading apparatus both in terms of accuracy of application of the radioactive source and comfort to the patient. A most important feature of the invention is the design of the present gripping means which will automatically grip the positioning member or tubular guide as it is passed therethrough and will also allow quick and easy disconnecting thereof after the therapy has been completed. Another important feature of the invention is the design wherein the abutment of the positioning member or tubular guide in the adaptor positively places the same for indexing the length of cable to be driven by the cable drive of the remote after-loading apparatus. Finally, an important feature of the invention is the indicator means for positively indicating that the tubular guide or positioning member is fully in place in the adaptor and the adaptor is fully in place in the head when the adaptor is used for connecting the tubular guide or the positioning member to the head of the remote after-loading apparatus. All of these features are most important and are substantial improvements in the art.

## Claims

1. A remote, after-loading apparatus for brachy radiotherapy comprising a radioactive source, a safe (1) for the source, a source drive cable (2), a guide member (4; 22; 30) for guiding the cable to the site of radiotherapy, a connection head (5) for connecting the guide member to the source drive cable, a positioning member (6; 20; 30) for positioning the source at the site of the radiotherapy and adaptors (7, 8; 23) for connecting the guide member to the connection head and/or to the positioning member, at least one of the said adaptors comprising:
  - (1) an outer barrel (40; 80) having an opened end (41) and a connector end (42; 90) and having a centrally extending barrel aperture (43; 81) therein;
  - (2) a sleeve (44; 92) having a first end (45; 96) and a second end (46) and a sleeve passageway (47) extending between said ends, and said sleeve being disposed within

said barrel such that at least the first end of the sleeve is contained within said barrel;  
(3) an elongated gripping means (49; 84) disposed through said sleeve passageway and extending beyond the ends of the said sleeve, said gripping means having:

(a) a gripping end (50; 98) and a receiving end (51);

(b) a gripping body (52) extending from said gripping end to said receiving end;

(c) a flange (53; 83) disposed on said gripping end where the diameter of the flange is greater than a diameter of said sleeve passageway at the first end thereof;

(d) a tapered outer surface (54; 97) extending from said flange to a distant portion (55; 101) of said gripping body;

(e) a uniform diameter gripping means tube bore (56) extending through said gripping means;

(f) at least two opposed slots (57; 99) passing through said flange and said gripping body and extending from said flange to at least said distant portion of said gripping body;

(g) said at least two slots forming at least two opposed gripping portions (58, 59) of said gripping means and said gripping portions being inwardly compressible when the said flange and gripping portions are in contact with the said first end of the sleeve (50) as to form a reduced diameter of said tube bore and thereby a closed position of the gripping portions, and said gripping portions being sufficiently resilient so that when the said flange and gripping portions are axially disposed from the said first end of the sleeve the gripping portions form at least the same diameter as the tube bore and thereby an open position, characterized by spring means (60; 91) disposed between said gripping means and said sleeve as well as between a shoulder (66) on said gripping means and a flange (67) within said sleeve, whereby the guide member (4; 22; 30) may be moved into the receiving end of the gripping means (49; 84), moved to an engagement with the said gripping portions (58, 59) in the said closed position, moved so as to cause the gripping means to be moved against said spring means (60; 91) axially outwardly from the first end of the said sleeve to a position where at least a portion of said tapered outer surface (54; 97) is spaced from the said first

end of the sleeve and the flange and gripping portions are resiliently moved to said open position and allow passage of the guide member therethrough, and upon ceasing the movement of the guide member, the spring means (60; 91) urges the gripping means axially inwardly in the said sleeve so that a portion of the said tapered outer surface contacts the said first end of the sleeve and compresses the said gripping portions to a locked position around said guide member.

2. The apparatus of claim 1 wherein the said barrel aperture (80) has an abutment (82) in substantially the same configuration as that of said flange (83) so that when the flange contacts the said abutment no further axial movement of said gripping means (84) is achievable.

3. The apparatus of claim 2 wherein the abutment (82) has an axially disposed abutment aperture (85) therein which has a diameter substantially equal to that of the said tube bore for passing the said guide member (4; 22; 30) therethrough.

4. The apparatus of claim 3 wherein the said abutment aperture (85) has a centering taper (89).

5. The apparatus of claim 3 wherein the said abutment aperture (85) connects with an indicator aperture (110) in an indicator means (111), said indicator means having:

(a) an indicator housing (112) with a connection end (113), an indicator end (114) and an axially positioned housing aperture (115) which housing aperture connects with said indicator aperture;

(b) an indicator body (116) disposed within said housing and within said indicator aperture and said indicator body connecting said connection end and said indicator end;

(c) an indicator bore (117) passes through said indicator body with a portion of the indicator bore which is within the indicator aperture having the same diameter as the tube bore of said gripping means (84) and the remainder of the indicator bore having a reduced bore (118) of a diameter which is less than the diameter of the said gripping means tube bore, whereby the said guide member (4; 22; 30) may be moved through said adaptor (7, 8; 23), and into said indicator means to a position where said guide

- member contact said reduced bore;  
 (d) an indicator flange (119) disposed of the indicator end of the indicator body, said flange having a diameter greater than the diameter of the housing aperture;  
 (e) spring means (120) disposed between said housing and said indicator body for urging the indicator body towards said abutment aperture;  
 whereby when said guide member abuts the said reduced diameter and when the said guide member is axially moved toward said indicator end of the housing, the indicator flange is displaced from the housing and provides an indication that the said guide member has reached the said reduced diameter.
6. The apparatus of claim 5 wherein the end of the said indicator bore (117) which connects with the said abutment aperture (109) has a centering taper (123).
  7. The apparatus of claim 1 wherein the said sleeve passageway (47; 93) has a tapered portion (95) adjacent said first end (45; 96) and wherein the said tapered portion is of the same taper configuration as the tapered outer surface (54; 97) of the gripping means (49; 84).
  8. The apparatus of claim 1 wherein there is a recess (93) in the sleeve passageway and the said spring means (91) is disposed in the recess and held therein by the recess and the outer surface of the gripping means (49; 84).
  9. The apparatus of claim 8 wherein the spring means (91) is a coiled spring.
  10. The apparatus of claim 9 wherein the coiled spring (91) surrounds the gripping means (49; 84).
  11. The apparatus of claim 1 wherein the tube receiving end (51) of the gripping means (49) has a centering taper surrounding said gripping means tube bore (56).
  12. The apparatus of claim 1 wherein the said flange (83) has a diameter slightly less than a diameter of the said barrel aperture (81).
  13. The apparatus of claim 1 wherein the said tapered outer surface (54; 97) of the gripping means (49; 84) is a straight or curved taper.
  14. The apparatus of claim 13 wherein the said taper is a straight taper.

15. The apparatus of claim 1 wherein there are three slots (57; 99) and three gripping portions (58, 59).
16. The apparatus of claim 15 wherein the slots (57; 99) are 120° apart and the gripping portions (58, 59) are of equal size.
17. The apparatus of claim 1 wherein there are four slots (57; 99) and four gripping portions (58, 59).
18. The apparatus of claim 17 wherein the slots (57; 99) are 90° apart and the gripping portions (58, 59) are of equal size.
19. The apparatus of claim 1 wherein the slots (57; 99) extend to at least one-quarter of the length of the gripping body (52).
20. The apparatus of claim 19 wherein the slots (57; 99) extend to at least one-half the length of the gripping body (52).
21. The apparatus of claim 1 wherein the said distant portion (55; 101) of the gripping body (52) to which the said taper extends is a distance from the flange (53; 83) which is at least equal to the diameter of the gripping means bore (56).
22. The apparatus of claim 21 wherein the said distance is at least equal to twice the diameter of the gripping means bore (56).

#### Patentansprüche

1. Fern-Nachladegerät zur Brachystrahlentherapie mit einer radioaktiven Quelle, einer Umhüllung (1) für die Quelle, einem Quellenantriebskabel (2), einem Führungsglied (4; 22; 30) zum Führen des Kabels zu der Strahlentherapiestelle, einem Verbindungskopf (5) zum Verbinden des Führungsgliedes mit dem Quellenantriebskabel, einem Positionierglied (6; 20; 30) zum Positionieren der Quelle an der Strahlentherapiestelle und Adaptern (7, 8; 23) zum Verbinden des Führungsgliedes mit dem Verbindungskopf und/oder mit dem Positionierglied, wobei mindestens einer der Adapter folgende Merkmale aufweist:
  - (1) einen Außenmantel (40; 80) mit einem geöffneten Ende (41) und einem Verbindungsende (42; 90) und mit einer sich darin zentral erstreckenden Mantelöffnung (43; 81);
  - (2) eine Hülse (44; 92) mit einem ersten Ende (45; 96) und einem zweiten Ende (46)



und mit einem sich zwischen den genannten Enden erstreckenden Hülse durchgang (47), wobei die Hülse in dem Mantel derart angeordnet ist, daß mindestens das erste Hülseende sich in dem Mantel befindet;

(3) ein langgestrecktes Klemmelement (49; 84), das durch den Hülse durchgang angeordnet ist und sich bis an den Hülseenden vorbei erstreckt, welches Klemmelement folgende Merkmale aufweist:

(a) ein Klemmende (50; 98) und ein Aufnahmeende (51);

(b) einen sich vom Klemmende zum Aufnahmeende erstreckenden Klemmkörper (52);

(c) einen Flansch (53; 83), der auf dem Klemmende dort angeordnet ist, wo der Flanschdurchmesser größer ist als der Durchmesser des Hülse durchgangs am ersten Hülseende;

(d) eine kegelförmige Außenfläche (54; 97), die sich vom Flansch zu einem entfernten Teil (55; 101) des Klemmkörpers erstreckt;

(e) eine durch das Klemmelement verlaufende Rohrbohrung (56) mit gleichmäßigem Durchmesser;

(f) mindestens zwei gegenüberliegende Schlitze (57; 99), die durch den Flansch und den Klemmkörper verlaufen und sich vom Flansch zu mindestens dem entfernten Teil des Klemmkörpers erstrecken;

(g) welche mindestens zwei Schlitze mindestens zwei gegenüberliegende Klemmteile (58, 59) des Klemmelements bilden, welche Klemmteile einwärts zusammen-drückbar sind, wenn der Flansch und die Klemmteile mit dem ersten Hülseende (50) in Berührung sind, um einen verringerten Durchmesser der Rohrbohrung und dadurch eine Schließlage der Klemmteile zu erzielen, wobei die Klemmteile genügend elastisch sind, so daß bei axialer Anordnung des Flansches und der Klemmteile vom ersten Hülseende die Klemmteile mindestens denselben Durchmesser wie die Rohrbohrung und dadurch eine Offenlage bilden, gekennzeichnet durch ein Federelement (60; 91), das zwischen dem Klemmelement und der Hülse sowie zwischen einer Schulter (66) auf dem Klemmelement und einem Flansch (67) in der Hülse angeordnet ist, wobei das Führungsglied (4; 22; 30) in das Aufnahmeende des Klemmelements (49; 84) bewegbar ist, im Eingriff mit den Klemmteilen (58, 59) in der Schließlage bringbar ist, bewegbar

ist, um das Klemmelement entgegen dem Federelement (60; 91) axial auswärts vom ersten Hülseende in eine Lage zu bringen, in der mindestens ein Teil der kegelförmigen Außenfläche (54; 97) vom ersten Hülseende entfernt liegt, und der Flansch und die Klemmteile elastisch in die Offenlage gebracht werden und das Führungsglied durchlassen, und beim Beenden der Bewegung des Führungsgliedes das Federelement (60; 91) das Klemmelement axial einwärts in die Hülse drängt, so daß ein Teil der kegelförmigen Außenfläche mit dem ersten Hülseende in Berührung kommt und die Klemmteile in eine Sperrlage um das Führungsglied zusammendrückt.

2. Gerät nach Anspruch 1, wobei die Mantelöffnung (80) einen Anschlag (82) aufweist, der im wesentlichen dieselbe Form wie der Flansch (83) hat, so daß bei Berührung des Flansches mit dem Anschlag keine weitere Axialbewegung des Klemmelements (84) durchführbar ist.

3. Gerät nach Anspruch 2, wobei der Anschlag (82) eine axial angeordnete Anschlagöffnung (85) aufweist, deren Durchmesser zum Durchlassen des Führungsgliedes (4; 22; 30) im wesentlichen gleich dem der Rohrbohrung ist.

4. Gerät nach Anspruch 3, wobei die Anschlagöffnung (85) einen Zentrierkegel (89) aufweist.

5. Gerät nach Anspruch 3, wobei die Anschlagöffnung (85) mit einer Anzeigeröffnung (110) in einem Anzeigerelement (111) in Verbindung steht, welches Anzeigerelement folgende Merkmale aufweist:

(a) ein Anzeigergehäuse (112) mit einem Verbindungsende (113), einem Anzeigerende (114) und einer axial angeordneten Gehäuseöffnung (115), welche Gehäuseöffnung mit der Anzeigeröffnung in Verbindung steht;

(b) einen Anzeigerkörper (116), der in dem Gehäuse und in der Anzeigeröffnung angeordnet ist und das Verbindungsende und das Anzeigerende miteinander verbindet;

(c) eine Anzeigerbohrung (117), die durch den Anzeigerkörper verläuft, wobei ein Teil der Anzeigerbohrung, der sich in der Anzeigeröffnung befindet, denselben Durchmesser aufweist wie die Rohrbohrung des Klemmelements (84) und der übrige Teil der Anzeigerbohrung eine verkleinerte Bohrung (118) mit einem Durchmesser aufweist,

- der geringer als der Durchmesser der Rohrbohrung des Klemmelements ist, wobei das Führungsglied (4; 22; 30) durch den Adapter (7, 8; 23) bewegbar und in das Anzeigerelement in eine Lage bringbar ist, in der das Führungselement mit der verkleinerten Bohrung in Berührung ist;
- (d) einen Anzeigerflansch (119), der auf dem Anzeigerende des Anzeigerkörpers angeordnet ist und dessen Durchmesser größer als der Durchmesser der Gehäuseöffnung ist;
- (e) ein Federelement (120), das zum Drücken des Anzeigerkörpers gegen die Anschlagöffnung zwischen dem Gehäuse und dem Anzeigerkörper angeordnet ist;
- wobei beim Anstoß des Führungsgliedes an den verkleinerten Durchmesser und bei der Axialbewegung des Führungsgliedes gegen das Anzeigerende des Gehäuses der Anzeigerflansch von dem Gehäuse weggeschoben wird und anzeigt, daß das Führungsglied den verkleinerten Durchmesser erreicht hat.
6. Gerät nach Anspruch 5, wobei das Ende der Anzeigerbohrung (117), das mit der Anschlagöffnung (109) in Verbindung steht, einen Zentrierkegel (123) aufweist.
  7. Gerät nach Anspruch 1, wobei der Hülse durchgang (47; 93) nahe dem ersten Ende (45; 96) einen Zentrierkegel (123) aufweist und wobei der Zentrierkegel dieselbe Kegelform wie die kegelförmige Außenfläche (54; 97) des Klemmelements (49; 84) aufweist.
  8. Gerät nach Anspruch 1, wobei sich in dem Hülse durchgang eine Ausnehmung (93) befindet und das Federelement (91) in der Ausnehmung angeordnet ist und darin durch die Ausnehmung und die Außenfläche des Klemmelements (49; 84) gehalten ist.
  9. Gerät nach Anspruch 8, wobei das Federelement (91) eine Spiralfeder ist.
  10. Gerät nach Anspruch 9, wobei die Spiralfeder (91) das Klemmelement (49; 84) umgibt.
  11. Gerät nach Anspruch 1, wobei das Rohraufnahmeende (51) des Klemmelements (49) einen die in dem Klemmelement vorgesehene Rohrbohrung (56) umgebenden Zentrierkegel aufweist.
  12. Gerät nach Anspruch 1, wobei der Flansch (83) einen Durchmesser aufweist, der etwas geringer als der Durchmesser der Mantelöffnung

(81) ist.

13. Gerät nach Anspruch 1, wobei die kegelförmige Außenfläche (54; 97) des Klemmelements (49; 84) ein gerader oder gebogener Kegel ist.
14. Gerät nach Anspruch 13, wobei der Kegel ein gerader Kegel ist.
15. Gerät nach Anspruch 1, wobei drei Schlitz (57; 99) und drei Klemmteile (58, 59) vorgesehen sind.
16. Gerät nach Anspruch 15, wobei die Schlitz (57; 99) um 120° auseinanderliegen und die Klemmteile (58, 59) gleiche Abmessungen aufweisen.
17. Gerät nach Anspruch 1, wobei vier Schlitz (57; 99) und vier Klemmteile (58, 59) vorgesehen sind.
18. Gerät nach Anspruch 17, wobei die Schlitz (57; 99) um 90° auseinanderliegen und die Klemmteile (58, 59) gleiche Abmessungen aufweisen.
19. Gerät nach Anspruch 1, wobei die Schlitz (57; 99) sich bis zu mindestens einem Viertel der Länge des Klemmkörpers (82) erstrecken.
20. Gerät nach Anspruch 19, wobei die Schlitz (57; 99) sich bis zu mindestens der Hälfte der Länge des Klemmkörpers (52) erstrecken.
21. Gerät nach Anspruch 1, wobei der entfernte Teil (55; 101) des Klemmkörpers (52), bis zu dem der Kegel sich erstreckt, über einen Abstand von dem Flansch (53; 83) entfernt ist, der mindestens gleich dem Durchmesser der Bohrung (56) des Klemmelements ist.
22. Gerät nach Anspruch 21, wobei der genannte Abstand mindestens gleich zweimal dem Durchmesser der Bohrung (56) des Klemmelements ist.

#### Revendications

1. Appareil de recharge à distance pour radiothérapie brachiale comprenant une source radioactive, un coffrage (1) pour la source, un câble de commande de la source (2), un élément de guidage (4; 22; 30) pour guider le câble vers le site de radiothérapie, une tête de connexion (5) pour raccorder l'élément de guidage au câble de commande de la source, un élément de positionnement (6; 20; 30) pour

positionner la source à hauteur du site de radiothérapie et des adaptateurs (7; 8; 23) pour raccorder l'élément de guidage à la tête de connexion et/ou à l'élément de positionnement, au moins un desdits adaptateurs comprenant:

(1) un cylindre externe (40; 80) possédant une extrémité ouverte (41) et une extrémité de connexion (42; 90) et une ouverture du cylindre s'étendant centralement (43; 81);

(2) un manchon (44; 92) possédant une première extrémité (45; 96) et une deuxième extrémité (46) et un passage de manchon (47) s'étendant entre lesdites extrémités et ledit manchon étant disposé à l'intérieur dudit cylindre de telle manière qu'au moins la première extrémité du manchon soit contenue dans ledit cylindre;

(3) des moyens de prise allongés (49; 84) disposés à travers ledit passage de manchon et s'étendant au-delà des extrémités dudit manchon, lesdits moyens de prise comprenant:

(a) une extrémité de prise (50; 98) et une extrémité de réception (51);

(b) un corps de prise (52) s'étendant de ladite extrémité de prise vers ladite extrémité de réception;

(c) une bride (55; 83) disposée sur ladite extrémité de prise et où le diamètre de la bride est supérieur au diamètre dudit passage de manchon à sa première extrémité;

(d) une surface externe conique (54; 97) s'étendant de ladite bride vers une partie distante (55; 101) dudit corps de prise;

(e) un alésage de tube de diamètre uniforme des moyens de prise s'étendant à travers lesdits moyens de prise;

(f) au moins deux fentes opposées (57; 99) traversant ladite bride et ledit corps de prise et s'étendant de ladite bride vers au moins ladite partie distante dudit corps de prise;

(g) lesdites au moins deux fentes formant au moins deux parties de prise opposées (58; 59) desdits moyens de prise et lesdites parties de prise étant compressibles vers l'intérieur lorsque ladite bride et lesdites parties de prise sont en contact avec ladite première extrémité du manchon (50) de manière à former un diamètre réduit dudit alésage du tube et ainsi une position fermée des parties de prise et lesdites parties de prise étant suffisamment élastiques pour que ladite bride et lesdites parties de prise soient disposées axialement depuis ladite première extrémité du manchon, lesdites parties

de prise formant au moins le même diamètre que l'alésage du tube et par conséquent une position ouverte, caractérisé par des moyens de ressort (60; 91) disposés entre lesdits moyens de prise et ledit manchon ainsi qu'entre un rebord (66) sur lesdits moyens de prise et une bride (67) dans ledit manchon, l'élément de guidage (4; 22; 30) pouvant être déplacé dans l'extrémité de réception des moyens de prise (49; 84), déplacés vers un engagement avec lesdites parties de prise (58; 59) dans ladite position fermée, déplacées de manière à amener les moyens de prise à se déplacer contre lesdits moyens à ressort (60; 91) axialement vers l'extérieur depuis la première extrémité dudit manchon vers une position où au moins une partie de ladite surface externe conique (54; 97) est espacée de ladite première extrémité du manchon et la bride et les parties de prise étant déplacés de manière élastique vers ladite position ouverte et permettant le passage de l'élément de guidage à travers elles et, à la fin du mouvement de l'élément de guidage, les moyens à ressorts (60; 91) pressent les moyens de prise axialement vers l'intérieur dans ledit manchon de sorte qu'une partie de ladite surface externe conique soit en contact avec ladite première extrémité du manchon et comprime lesdites parties de prise dans une position verrouillée autour dudit élément de guidage.

2. Appareil selon la revendication 1, dans lequel ladite ouverture (80) du cylindre présente une butée (82) d'une configuration essentiellement identique à celle de ladite bride (83) de telle sorte que lorsque bride entre en contact avec ladite butée, aucun mouvement axial ultérieur desdits moyens de prise (84) n'est possible.

3. Appareil selon la revendication 2, dans lequel la butée (82) possède une ouverture de butée (85) disposée axialement qui possède un diamètre essentiellement égal à celui dudit alésage du tube pour y passer ledit élément de guidage (4; 22; 30).

4. Appareil selon la revendication 3 dans lequel ladite ouverture de butée (85) possède un cône de centrage (89).

5. Appareil selon la revendication 3, dans lequel ladite ouverture de butée (85) est reliée à une

ouverture d'indicateur (110) dans un moyen indicateur (111), ledit moyen indicateur possédant:

- (a) un boîtier indicateur (112) avec une extrémité de connexion (113), une extrémité d'indicateur (114) et une ouverture de boîtier (115) positionnée axialement qui assure la connexion avec ladite ouverture d'indicateur;
  - (b) un corps d'indicateur (116) disposé dans ledit boîtier et dans ladite ouverture d'indicateur et ledit corps indicateur reliant ladite extrémité de connexion et ladite extrémité d'indicateur;
  - (c) un alésage d'indicateur (117) traverse ledit corps indicateur avec une partie de l'alésage d'indicateur qui se trouve à l'intérieur de l'ouverture d'indicateur possédant le même diamètre que l'alésage du tube dudit moyen de prise (84) et le reste de l'alésage indicateur possédant un alésage réduit (118) d'un diamètre inférieur au diamètre de l'alésage du tube des moyens de prise, ledit élément de guidage (4; 22; 30) pouvant être déplacé à travers ledit adaptateur (7; 8; 32) et dans ledit moyen indicateur dans une position où ledit élément de guidage est en contact avec ledit alésage réduit;
  - (d) une bride d'indicateur (119) disposée à l'extrémité d'indicateur du corps d'indicateur, ladite bride possédant un diamètre supérieur au diamètre de l'ouverture du boîtier;
  - (e) des moyens de ressort (120) disposés entre ledit boîtier et ledit corps d'indicateur pour presser le corps indicateur vers ladite ouverture de butée;
- auquel cas, lorsque ledit élément de guidage bute contre ledit diamètre réduit et lorsque ledit élément de guidage est déplacé axialement vers ladite extrémité d'indicateur du boîtier, la bride d'indicateur est déplacée du logement et fournit une indication que ledit élément de guidage a atteint ledit diamètre réduit.
6. Appareil selon la revendication 5, dans lequel l'extrémité dudit alésage d'indicateur (117) qui assure la connexion avec ladite ouverture de butée (109) possède un cône de centrage (123).
  7. Appareil selon la revendication 1, dans lequel ledit passage de manchon (47; 93) possède une partie conique (95) adjacente à ladite première extrémité (45; 96) et dans lequel ladite partie conique est de la même configuration conique que la surface externe conique (54;

97) des moyens de prise (49; 84).

8. Appareil selon la revendication 1, dans lequel il y a un évidement (93) dans le passage de manchon et ledit moyen à ressort (91) est disposé dans l'évidement et y est maintenu par l'évidement et la surface externe des moyens de prise (49; 84).
9. Appareil selon la revendication 8 dans lequel le moyen de ressort (91) est un ressort hélicoïdal.
10. Appareil selon la revendication 9 dans lequel le ressort hélicoïdal (91) entoure les moyens de prise (49, 84).
11. Appareil selon la revendication 1, dans lequel le tube recevant l'extrémité (51) du moyen de prise (49) possède un cône de centrage entourant ledit alésage de tube (56) du moyen de prise.
12. Appareil selon la revendication 1, dans lequel ladite bride (83) possède un diamètre légèrement inférieur au diamètre de ladite ouverture du cylindre (81).
13. Appareil selon la revendication 1, dans lequel ladite surface extérieure conique (54; 97) des moyens de prise (49; 84) est un cône droit ou incurvé.
14. Appareil selon la revendication 13, dans lequel ledit cône est un cône droit.
15. Appareil selon la revendication 1 qui présente trois fentes (57; 99) et trois parties de prise (58, 59).
16. Appareil selon la revendication 15, dans lequel les fentes (57; 99) sont espacées de 120° et les parties de prise (58, 59) sont de dimensions égales.
17. Appareil selon la revendication 1 qui comporte quatre fentes (57; 99) et quatre parties de prise (58; 59).
18. Appareil selon la revendication 17, dans lequel les fentes (57, 99) sont espacées de 90° et les parties de prise (58; 59) sont de dimensions égales.
19. Appareil selon la revendication 1, dans lequel les fentes (57; 99) s'étendent sur au moins un quart de la longueur du corps de prise (52).

20. Appareil selon la revendication 19, dans lequel les lentes (57; 99) s'étendent sur au moins la moitié de la longueur du corps de prise (52).

21. Appareil selon la revendication 1, dans lequel ladite partie distante (55; 101) du corps de prise (52) vers lequel ledit cône s'étend est à une distance de ladite bride (53; 83) au moins égale au diamètre de l'alésage des moyens de prise (56). 5  
10

22. Appareil selon la revendication 21, dans lequel ladite distance est au moins égale à deux fois le diamètre de l'alésage des moyens de prise (56). 15

20

25

30

35

40

45

50

55

15

FIG. 1

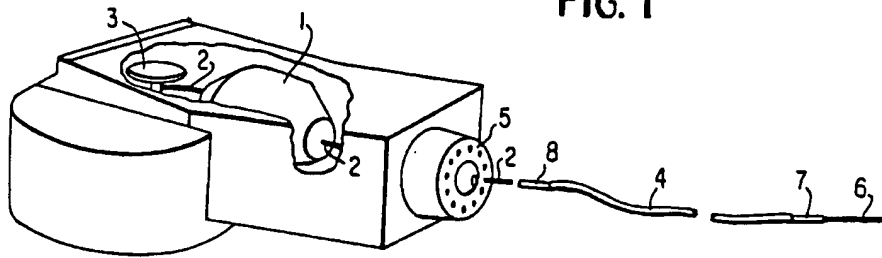


FIG. 2

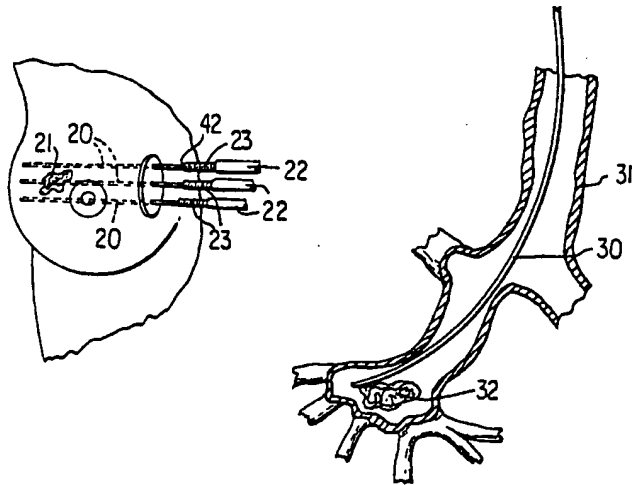


FIG. 3

FIG. 4

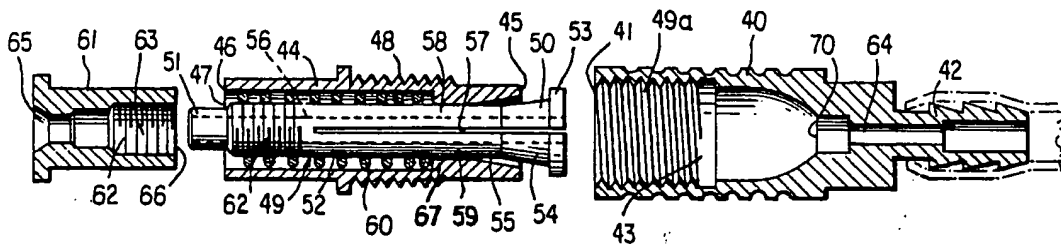


FIG. 5

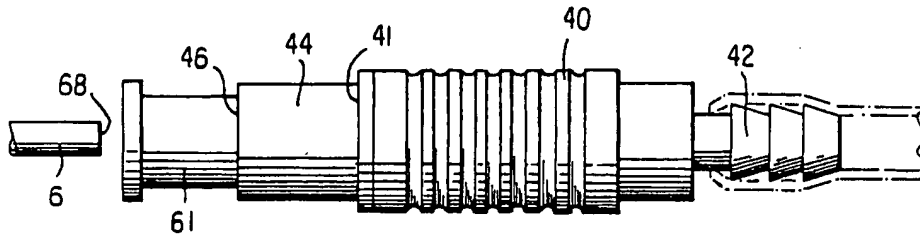


FIG. 6


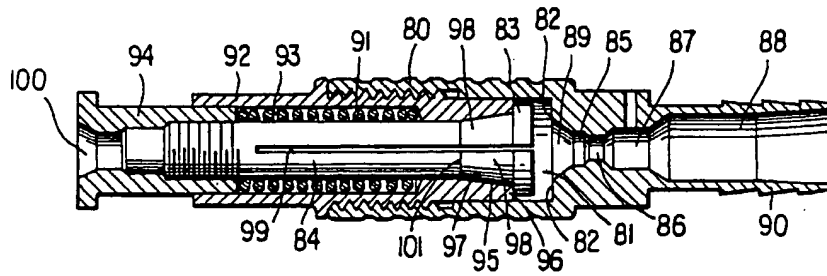


FIG. 7

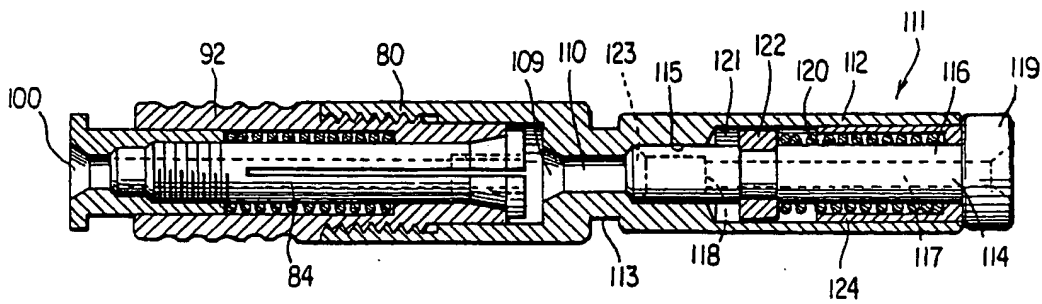

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☒ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**